

# AMERICAN RANGE

QUALITY LINE OF COOKING EQUIPMENT

## HD36-RGBSH / HD45-RGBSH RADIANT STEAKHOUSE GRIDDLE / BROILERS

### STANDARD FEATURES

- 25,000 BTU per burner strategically spaced for maximum grid coverage and burner efficiency.
- Extra wide grease trough.
- High efficiency Inconel® burner has welded Stainless Steel construction.
- Stainless Steel front and sides (standard).
- Approximately 1800°F grid cooking temperatures.
- Welded frame construction.
- 3/4" thick polished steel searing griddle plate with 2" Stainless Steel splash guard.
- Stainless Steel sealed grid bearing mitigates corrosion and seizing.
- Independent burner controls with infinite burner control.
- Welded gussets.
- 3/8" round-bar broiling grid.
- 4 position grid height adjustment with 4.5" range.
- Secure locking lift mechanism with "cool touch" knob.
- Removable Stainless Steel full-width grease deflector.
- Removable large capacity Stainless Steel grease can (565 cu. in.).
- One year limited warranty, parts and labor.



HG45-RGBSH  
Shown with optional casters and stand.




HD-RGBSH models have high efficiency Inconel burners that achieve 1800°F surface temperatures for searing perfection. Infrared burners direct heat waves downward to penetrate the exposed surfaces of the meat. Meat is cooked entirely by infrared heat. Meats experience minimal shrinkage while retaining juices, tenderness and flavor. Broiler has adjustable valve system.

The grease pan extends the full width of the broiler and is removable for easy clean-up. Broiler grid is spring balanced and raises and lowers with positive locking in 4 positions.

Look at American Range for innovation, reliable performance, quality and attention to your equipment needs and prompt delivery, now and for all your future needs.

# HD36-RGBSH / HD45-RGBSH RADIANT STEAKHOUSE GRIDDLE / BROILERS

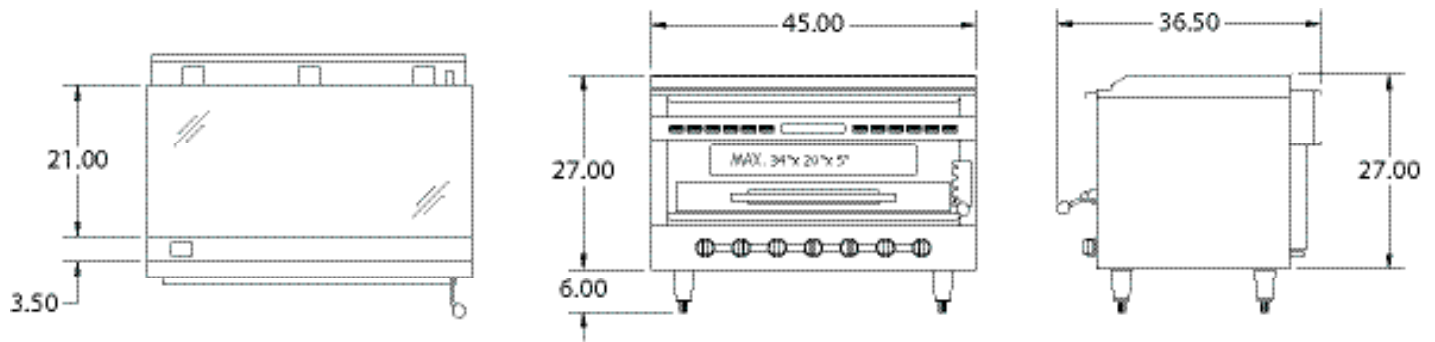

Model	Width	Depth	Height	Burners	Total BTU	KW	Shipping Weight	Lbs.	Kg.
HD36-RGBSH	36"	31"	27-1/4"	5	125,000	37		490	223
HD45-RGBSH	45"	31"	27-1/4"	7	175,000	51		660	300

## STANDARD FEATURES

- 25,000 BTU per burner strategically spaced for maximum grid coverage and burner efficiency.
- Extra wide grease trough.
- High efficiency Inconel® burner has welded Stainless Steel construction.
- Stainless Steel front and sides (standard).
- Approximately 1800°F grid cooking temperatures.
- Welded frame construction.
- 3/4" thick polished steel searing griddle plate with 2" Stainless Steel splash guard.
- Stainless Steel sealed grid bearing mitigates corrosion and seizing.
- Independent burner controls with infinite burner control.
- Welded gussets.
- 3/8" round-bar broiling grid.
- 4 position grid height adjustment with 4.5" range.
- Secure locking lift mechanism with "cool touch" knob.
- Removable Stainless Steel full-width grease deflector.
- Removable large capacity Stainless Steel grease can (565 cu. in.).
- One year limited warranty, parts and labor.

GA SUPPLY: 3/4" NPT Gas inlet. Manifold pressure is 5.0"W.C. for natural gas or 10.0"W.C. for propane gas. 3/4" NPT Gas inlet. Specify type of gas and altitude if over 2000 feet.

Clearances: For use only on non-combustible floors. Legs or casters are required, or 2" (51) overhang is required when curb mounted. Clearance from non-combustible walls is 0". When unit is placed next to combustible walls, clearances must exceed 12" (305) on sides, and 4" (102) from rear: Radiant broilers for non-combustible locations only.

American Range is a quality manufacturer of commercial cooking equipment. Because of continuing product improvements these specifications are subject to change without prior notice.



13592 Desmond St. Pacoima CA 91331  
 T. 818.897.0808 F. 818.897.1670  
 Toll Free: 888.753.9898  
[www.americanrange.com](http://www.americanrange.com)