



A Division Of The Legacy Companies

Model BB-1224



Burnisher

Project Name:	
Location:	
Item:	Qty:
Model:	

SPECIAL PORCELAIN-CERAMIC BURNISHING MEDIA AND CHEMICAL COMPOUND NOW MAKES IT POSSIBLE TO RESTORE LUSTER AND BRIGHTNESS TO STAINLESS-STEEL FLATWARE AND HOLLOW WARE AS WELL AS SILVER.

FEATURES . . .

FROM THIS . . .

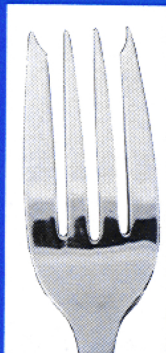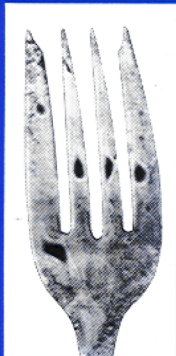

TO THIS . . .

- Open-top design for easy loading and unloading
- Porcelain-Ceramic Media 1/3 the weight of steel balls
- Light weight permits burnishing of hollow ware
- No peening effect on stainless or silver
- Produces high luster
- Quiet operation
- No external plumbing
- Stationary
- 115-volt, 60-cycle current grounded cord and plug approx. 9' long
- Porcelain-Ceramic balls cannot rust



In minutes . . . Tableware, both Stainless and Silver Plate are spotless. Also burnishes Aluminum Ware and Pewter . . . Other sizes available.

PHYSICAL CHARACTERISTICS

The frame is full-welded 1-1/2" 38mm x 1-1/2" 38mm CRS tubing, epoxy primed and painted. Skirt and covers are stainless steel. Tub is full-welded 11-ga. 3 mm CRS, epoxy primed and painted, lined with 3/8" 10mm cast polyurethane lining with molded urethane drain. The motor is 1-1/2 HP, 3450 rpm, 115 volts, single phase, 20.0 ampere, class A, constant-duty 104°F 40°C with a 3-1/2" 89 mm x 1/2" 13 mm drive pulley. The recirculating pump is P:AAA. Tank is two-gallon 7.6 liter capacity stainless steel. Eccentric shaft is 1" 25 mm diameter with double spherical roller bearings and a 2-3/4" 70 mm x 3/4" 19 mm drive pulley. The Silver Saver unit operates at a sound level of less than 85 dba. This unit is stationary and totally enclosed in stainless steel paneling with 2 access doors.

BURNISHING MEDIA

Pure porcelain ceramic media will not rust and its weight is one-third that of steel balls. This lighter weight eliminates peening and allows burnishing of hollow ware. The ceramic media lasts the life of the machine with an approximate loss of 5% per year.

- **THE BLAKESLEE SILVER SAVER™ IS THE ONLY BURNISHING UNIT THAT WILL RESTORE LUSTER AND BRIGHTNESS TO STAINLESS-STEEL TABLEWARE AS WELL AS SILVER PLATE.**



A Division Of The Legacy Companies

Model BB-1224

Burnisher

BURNISHING COMPOUND

The burnishing compound used in the Blakeslee Silver Saver provides fast and safe burnishing of stainless steel, silver and brass. Detarnish soaking in separate pans is not necessary with the Blakeslee Silver Saver.

Burnishing compound available in case lots containing
4-1 Gallon 3.8 Liter Bottles

OPERATING TECHNIQUE

After the compound tank is filled with the proper amount of water and burnishing compound, the Blakeslee Silver Saver is ready for a day's operation without further attention. Flatware should be "dishwashing clean" before placing in Silver Saver. Rewash flatware after burnishing. Pump operates for two (2) minutes to allow proper quantity of burnishing compound into tub. Pump is activated by the on/off toggle switch.


OPERATING TIME AND CAPACITY

The Blakeslee Silver Saver detarnishes and burnishes three gross of mixed flatware in a single operation and restores luster and brightness in less than 10 minutes. Reduces operating costs and provides the best possible flatware maintenance program. Items up to 23" 584 mm in length.

SHIPPING DATA

SHIPMENT 1 Carton (Total 580 Lbs. 263 kg.)
 MACHINE 265 Lbs. 120 kg.
 MEDIA 160 Lbs. 72 kg.
 COMPOUND
 2/1-Pint 0.48 Liters Bottles
 CARTON SIZE:
 52½" 1334 mm H, 31" 787 mm W, 43" 1092 mm L.
 CUBE: 40 ft. 1.147 m³.

Specifications subject to change without notice.

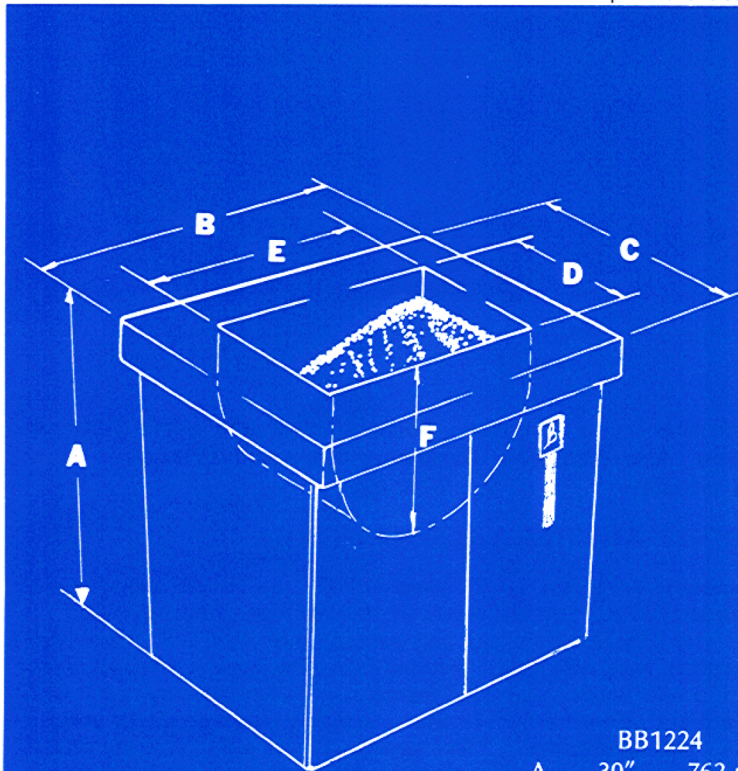

BB1224	
A	30" 762 mm
B	37" 940 mm
C	25" 635 mm
D	12" 305 mm
E	24" 610 mm
F	19" 483 mm

SPECIFICATIONS:

FRAME: 1½" 38 mm × 1½" 38 mm
CRS Tubing, Full-Welded;
epoxy primed and painted

FEET: (4) Adjustable

SKIRT AND COVERS: Stainless Steel 2 access
doors.

TUB: 3/8" 10 mm Cast Polyurethane
lining with molded urethane drain;
11 ga. 3 mm CRS — all seams full-
welded; epoxy paint

MOTOR: 1½HP 115 volt single phase
20.0 AMP Class A Constant
Duty 104°F. 40°C 3450
RPM Drive Pulley 3½" 89.
mm × ½" 13 mm.

COMPOUND TANK: Stainless-Steel — 2 gallon
7.6 liter.

COMPOUND PUMP: P:AAA

BEARINGS & ECCENTRIC SHAFT: Shaft 1" 25 mm dia.; Bear-
ings double spherical roller. Drive Pulley 2¾" 70 mm
× ¾" 19 mm

SOUND LEVEL: Silver Saver Burnishing
System operates at less
than 85 dba

WARRANTY: 1 Year; Defective Material
and Workmanship;
3-Year Tub Lining