



A Division Of The Legacy Companies

Model G-2000-F

Glasswasher

Project Name:

Location:

Item:

Qty:

Model:

- Solid Stainless Steel Construction
- Wash, Rinse, and Pressure Gauges located in Front
- Heavy Duty Scrap Tray
- Top and Side Access to Vacuum Breaker
- Heavy Duty Detergent Dispenser with Audio Alarm for Low Detergent Warning
- Adjustable Liquid Rinse and Sanitizer Pumps
- Simplicity
- Dependability
- Superior Performance
- Capacity: 1000 Glasses Per Hour
- Only available in 220v/60hz/1ph

DESIGN: Glasswasher shall be a fully automatic, rotary type glass-washing machine. Glasswasher shall be equipped with three separate pumps for detergent, sanitizer, and rinse aid. Initial fill of wash tank shall be automatic with a flip of a switch.

DIMENSIONS: Glasswasher shall be 39" in height, 25-1/8" in width, and 26" in depth.

CONSTRUCTION: Glasswasher shall be constructed of 18 gauge stainless steel with stainless steel legs.

ELECTRIC CONTROL PANEL: Controls shall be an integral part of machine.



CONVEYOR: Non-abrasive conveyor shall rotate in a clockwise direction.

WASH AND RINSE: Glassware shall be washed with a minimum of 140° recirculated water by upper and lower spray arms. Non-recirculated 75° rinse water shall also be through upper and lower spray arms.

TANK HEATING: Tank shall be heated by a 3 K.W. electric heating element.

STANDARD EQUIPMENT: Storage shelf for three (3) one-gallon size chemical containers behind door located in front of machine; splash curtain.



A Division Of The Legacy Companies

Model G-2000-F

PLAN VIEW


SPECIFICATIONS

Electrical:

Volts	Phase	Load AMPS
220	1	15

Water Requirements (100%)

Hot Inlet Temperature	140°F
Cold Inlet Temperature	75°
Inlet Pressure	20 psi
Inlet Size	1/2" Hose
Drain Size (gravity)	1-1/2" OD
Water Consumption	2.8 gpm
Initial Fill	3 gallons

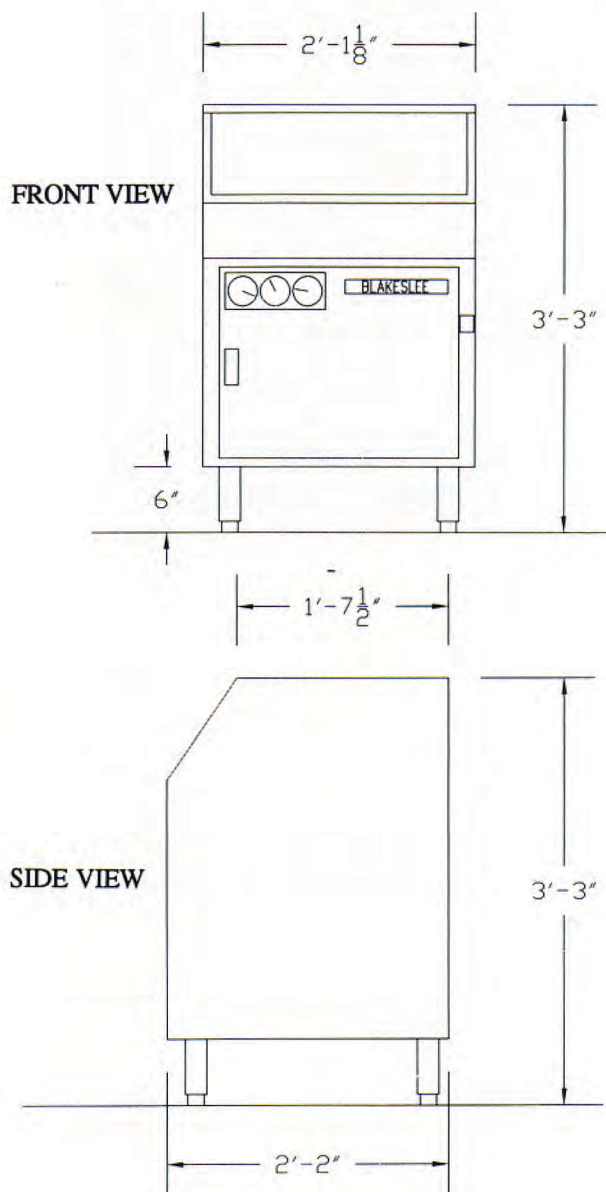


OUTSTANDING FEATURES

CAPACITY: 1000 Glasses Per Hour

OPERATING CYCLE: Total Cycle Time - 3 Minutes.

CONTROLS: On/Off Switch located on front of machine.

SUPERIOR WASH AND RINSE: Top and bottom spray arms.

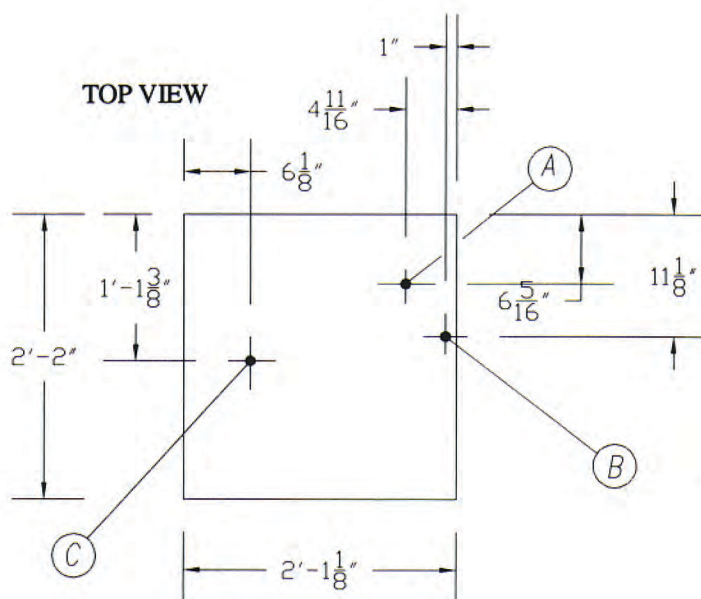

- Ⓐ HOT WATER CONNECTION (1/2" N.P.T. FEMALE FITTING)
- Ⓑ COLD WATER CONNECTION (1/2" N.P.T. FEMALE FITTING)
- Ⓒ 1-1/2" O.D. DRAIN

APPROXIMATE SHIPPING INFORMATION			
MODEL	DIMENSIONS	WEIGHT	CUBE
G-2000-F	47" X 27" X 28.5"	160 lbs.	21.0 Ft. ³

All Blakeslee dishwashers are designed to be in compliance with NSF, UL, CSA, and ASSE standards.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.