



A Division of The Legacy Companies

Project Name:

Location:

Item:

Qty:

Model:

MODEL UC-20

UNDERCOUNTER DISHWASHER

FEATURES:

- The Largest Door Opening in the industry at 18-5/16"
- 18 gauge Stainless Steel tank construction
- Up to 45 Racks per Hour
- All stainless steel, interchangeable Upper and Lower wash and rinse arms – easily removable for easy cleaning
- Built-in 6.6 kW booster
- Water consumption as low as 0.68 gallons per rack
- Quiet (low dB) Wash and Rinse
- 1.2 kW wash tank heater
- Built-in Detergent and Rinse Aid dispensers with hook-up provided
- Pump Drain provides versatility for installation locations
- Fully insulated wash compartment provides superior energy savings through consistent heating
- Cool-to-the-touch exterior
- Door Safety Switch
- Automatic tank fill with liquid level safety switch
- Stainless steel filters to protect Wash Pump
- Seven independent cycles: economy, economy plus, glassware, flatware, dishware, pot & pan, and programmable
- Intuitive Digital Display with cycle indicator light provides simplified Operational Instructions and allows for long range visibility
- Power Saving mode automatically regulates and reduces energy consumption if unit is left unattended for over 30 minutes.



OPTIONAL EQUIPMENT:

- Locking Latch for Shipboard Use
- Flanged feet for Shipboard Use





A Division of The Legacy Companies

Project Name:

Location:

Item:


Qty:

Model:

MODEL UC-20

UNDERCOUNTER DISHWASHER

DIMENSIONS

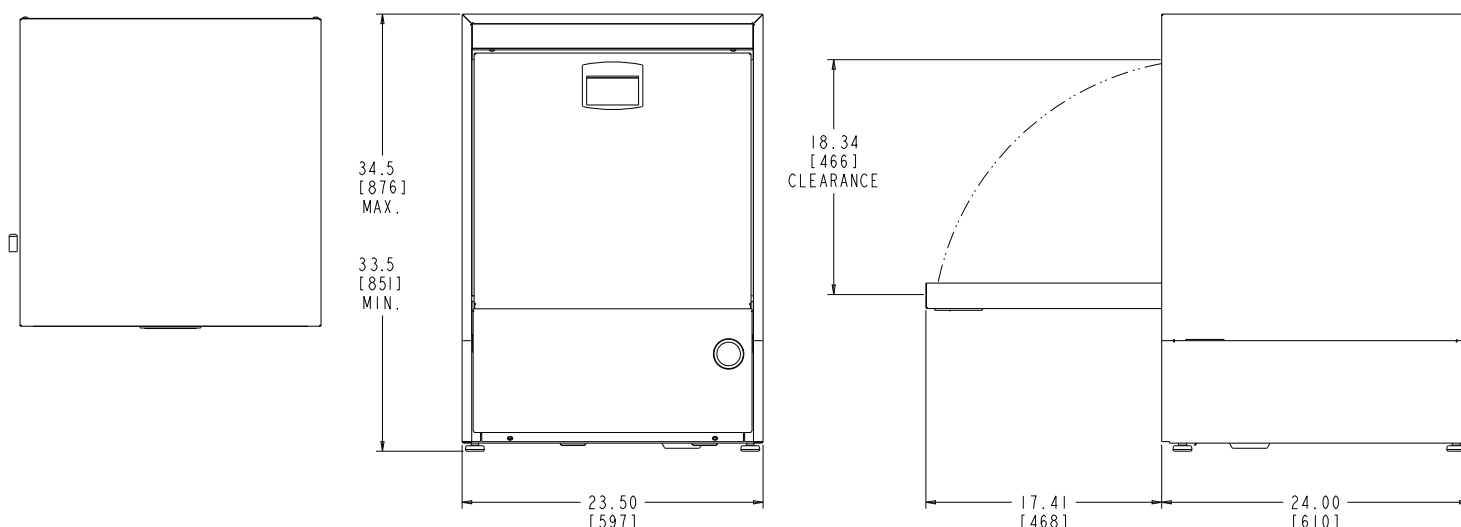

SPECIFICATIONS	
RACK SIZES	
DISH RACK	20" x 20"
FLAT RACK	20" x 20"
MOTOR	
HORSEPOWER	0.94
APPROX. SHIPPING INFO	
DIMENSIONS	30" x 30" x 42"
WEIGHT	140 lbs
ELECTRIC	
Voltage/Hertz/Phase	220-240/50-60/1
Total Amps	32.0 – 35.0
Voltage/Hertz/Phase	208-240/50-60/3
Total Amps	20.0 – 21.5
Voltage/Hertz/Phase	380-415/50-60/3
Total Amps	12.0

*Other voltages available – contact factory

All specifications are subject to change

All specifications are dependent on water pressure and temperature

MODEL UC20	USA	METRIC
WATER CONSUMPTION		
PER RACK	0.68 – 0.8 (gal)	2.5 – 3.0 (l)
OPERATING CYCLE		
WASH TIME (sec)	55 sec	55 sec
RINSE TIME (sec)	15 sec	15 sec
DWELL TIME (sec)	10 sec	10 sec
TOTAL CYCLE (sec)	80 sec	80 sec
OPERATING CAPACITY		
RACKS PER HOUR	45 - 20	45 - 20
WASH TANK CAPACITY	1.8 (gal)	6.8 (l)
CYCLE TEMPERATURES		
WASH	155°F	68°C
RINSE	180°F - 195°F	82°C - 91°C
WATER REQUIREMENTS		
INLET TEMPERATURE	140°F	60°C
FLOW PRESSURE	20-25 psi	1.4 – 1.7 kg/cm ²
WATER INLET CONNECTION	3/4" npt	3/4" npt
DRAIN CONNECTION	3/4" I.D.	3/4" I.D.