



## CPF SERIES

### BREAD SLICERS

Doyon's CPF Series are the most effective bread slicers on today's market. Slice up to 100 loaves per hour. It comes with a standard packing shelf and crumb drawer. Push the handle, put your bread and release the handle, slicer blades automatically start, breads are pushed through with a safety loaf pusher that passes each loaf completely through the slicer blades. The motor stops automatically when the loaf is sliced.



CPF412



CPF416



CPF422



CPF512



CPF516



CPF518



### STANDARD FEATURES

- Slices thickness:
  - Bread maximum length 17 5/16" (440 mm)
    - **CPF412:** 1/2" (12 mm)
    - **CPF416:** 5/8" (16 mm)
    - **CPF418:** 3/4" (18 mm)
    - **CPF422:** 7/8" (22 mm)
  - Bread maximum length 20 1/2" (520 mm)
    - **CPF512:** 1/2" (12 mm)
    - **CPF516:** 5/8" (16 mm)
    - **CPF518:** 3/4" (18 mm)
- Crumb drawer is included
- Includes device for bagging breads
- Capacity of up to 100 loaves per hour
- Floor model
- 4 casters (2 with locks)
- Motor only operates while cutting and automatically stops after bread has been cut
- Mechanically assisted infeed
- Progressive traction lever
- Two year parts and one year labor warranty

\*Not for sale in Quebec

*Experience our top-of-the-line products today!*



5600 13th Street • Menominee, MI 49858 USA

Phone: 906-863-4401


E-mail: sales@nu-vu.com

Toll Free: 1-800-338-9886


www.doyon.qc.ca

Fax: 906-863-5889

www.nu-vu.com

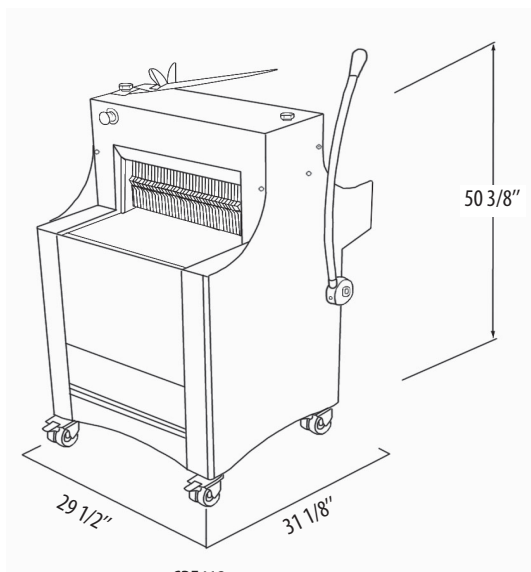

CPF412  
CPF416  
CPF418  
CPF422

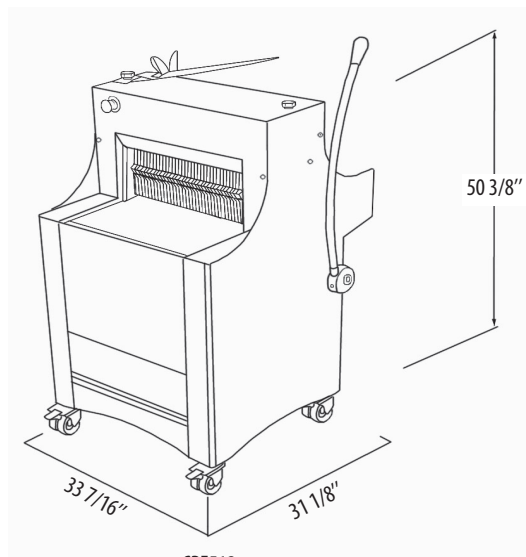

CPF512  
CPF516  
CPF518

## SPECIFICATIONS

| Model  | Crated Weight<br>lb (kg) | Dimensions     |               |                | Slices<br>thickness | Bread maximum<br>length | Bread maxi-<br>mum width | Bread maxi-<br>mum height | Motor<br>HP | Electrical system |      |        |    |       |
|--------|--------------------------|----------------|---------------|----------------|---------------------|-------------------------|--------------------------|---------------------------|-------------|-------------------|------|--------|----|-------|
|        |                          | W              | D             | H              |                     |                         |                          |                           |             | Volts             | Amps | Phases | Hz | NEMA  |
| CPF412 | 580 lb (263)             | 29 1/2" (750)  | 31 1/8" (790) | 50 3/8" (1280) | 1/2" (12)           | 17 5/16" (440)          | 12 3/16" (310)           | 6 5/16" (160)             | 2/3         | 120               | 6    | 1      | 60 | 5-15P |
| CPF416 | 580 lb (263)             | 29 1/2" (750)  | 31 1/8" (790) | 50 3/8" (1280) | 5/8" (16)           | 17 5/16" (440)          | 12 3/16" (310)           | 6 5/16" (160)             | 2/3         | 120               | 6    | 1      | 60 | 5-15P |
| CPF418 | 580 lb (263)             | 29 1/2" (750)  | 31 1/8" (790) | 50 3/8" (1280) | 3/4" (18)           | 17 5/16" (440)          | 12 3/16" (310)           | 6 5/16" (160)             | 2/3         | 120               | 6    | 1      | 60 | 5-15P |
| CPF422 | 580 lb (263)             | 29 1/2" (750)  | 31 1/8" (790) | 50 3/8" (1280) | 7/8" (22)           | 17 5/16" (440)          | 12 3/16" (310)           | 6 5/16" (160)             | 2/3         | 120               | 6    | 1      | 60 | 5-15P |
| CPF512 | 660 lb (300)             | 33 7/16" (850) | 31 1/8" (790) | 50 3/8" (1280) | 1/2" (12)           | 20 1/2" (520)           | 12 3/16" (310)           | 6 5/16" (160)             | 2/3         | 120               | 6    | 1      | 60 | 5-15P |
| CPF516 | 660 lb (300)             | 33 7/16" (850) | 31 1/8" (790) | 50 3/8" (1280) | 5/8" (16)           | 20 1/2" (520)           | 12 3/16" (310)           | 6 5/16" (160)             | 2/3         | 120               | 6    | 1      | 60 | 5-15P |
| CPF518 | 660 lb (300)             | 33 7/16" (850) | 31 1/8" (790) | 50 3/8" (1280) | 3/4" (18)           | 20 1/2" (520)           | 12 3/16" (310)           | 6 5/16" (160)             | 2/3         | 120               | 6    | 1      | 60 | 5-15P |



5600 13th Street • Menominee, MI 49858 USA

Phone: 906-863-4401 E-mail: sales@nu-vu.com  
Toll Free: 1-800-338-9886 www.doyon.qc.ca  
Fax: 906-863-5889 www.nu-vu.com