

RETARDER-PROOFERS

"Superior **quality** product
at an **affordable** price !"



**ER136 &
ER136TLO**



**ER236 &
ER236TLO**

Retarder-Proofers FEATURING

- Keeps your products refrigerated and switches automatically on proofing system
- Integrated automatic gravitational cooling system
- 7 day timer
- Heavy duty thermostat and humidity control
- Perfect humidity and temperature for a consistent environment using Doyon's even air flow system
- Energy efficient
- Controls at eye level
- Heavy duty door opening/closing system
- Aluminum flush floor entry
- 2" (51 mm) thick sealed polyurethane insulation
- Interior and exterior bumper guards accommodate racks 18" X 26" (457 mm X 660 mm) or 20" X 30" (508 mm X 762 mm) up to 68 1/2" (1715 mm) high
- Stainless steel construction meets industry standards
- Shipped fully assembled
- No flushing required
- Brightly lit
- ETL listed
- One year parts and labor limited warranty

OPTIONAL

- Full set of rust and scratch proof shelving
- Hinged left or right
- Doyon roll-in racks

Retarder-Proofers

Control of temperature and environment is important in order to get flavorful products. Our refrigerated retarder-proofers can maintain virtually any temperature and humidity under a variety of conditions.

Doyon offers a full selection of retarder-proofers for maximum results including: low temperature fermentation room for all kinds of products, virtually maintenance free humidification and temperature conditioning unit.

Option available for use with remote refrigeration

*This option has a suffix RC (ie ER236RC)

*Available for R404 & R134A

DIMENSIONS

ER136	37 1/2"W	X 50 1/4"D	X 89 3/4"H
	(952 mm)	X 1275 mm	X 2280 mm)
ER236	71"W	X 44 1/4"D	X 88"H
	(1805 mm)	X 1125 mm	X 2235 mm)
ER136TLO	37 1/2"W	X 50 1/4"D	X 96 1/4"H
	(952 mm)	X 1275 mm	X 2445 mm)
ER236TLO	71"W	X 44 1/4"D	X 94 1/2"H
	(1805 mm)	X 1125 mm	X 2400 mm)

DOOR OPENING

ER136 & ER236

27"W X 68 3/4"H
(686 mm X 1745 mm)

ER136TLO & ER236TLO

27"W X 75 1/4"H
(686 mm X 1910 mm)

ELECTRICAL SYSTEM

ER136 & ER136TLO

120/208V - 1 PH - 27 A - 5.7 kW - 3 wires - 60 Hz

120/240V - 1 PH - 24 A - 5.7 kW - 3 wires - 60 Hz

ER236 & ER236TLO

120/208V - 1 PH - 35 A - 7.2 kW - 3 wires - 60 Hz

120/240V - 1 PH - 30 A - 7.2 kW - 3 wires - 60 Hz

Other voltages available

FINISH

Stainless steel inside and outside

SHIPPING WEIGHT

ER136 : 900 lb (409 kg) approximately


ER236 : 1000 lb (454 kg) approximately

ER136TLO : 900 lb (409 kg) approximately


ER236TLO : 1000 lb (454 kg) approximately

Specifications and design subject to change without notice.

ER136 & ER136TLO

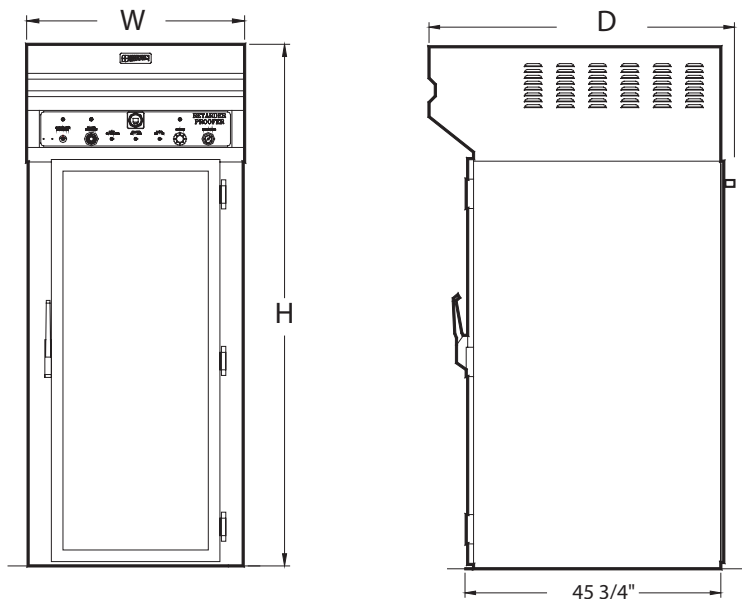

ER236 & ER236TLO

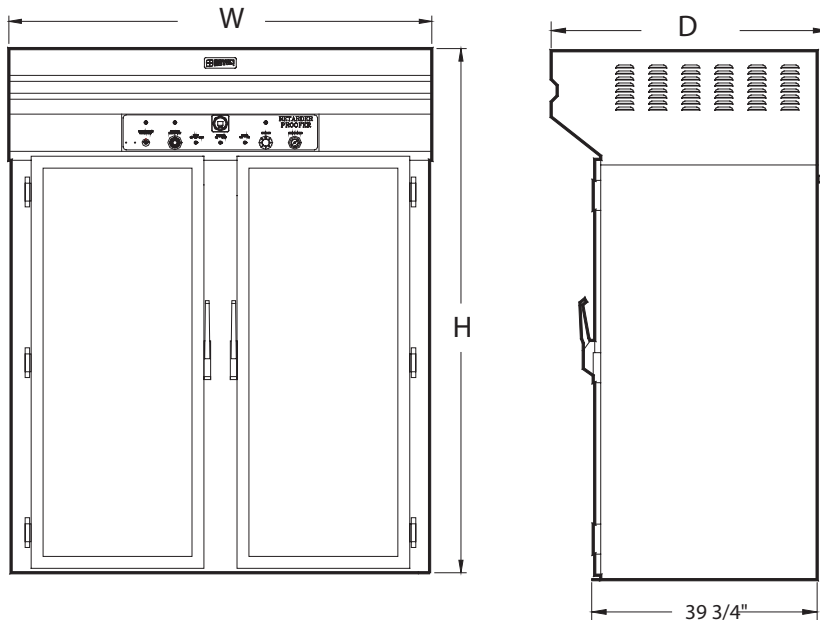

1255, rue Principale
Linière, Beauce, Québec, Canada G0M 1J0

Telephone.: 418-685-3431
Canada: 1-800-463-1636
E-mail : doyon@doyon.qc.ca

Fax: 418-685-3948
U.S.: 1-800-463-4273
Internet : <http://www.doyon.qc.ca>



Your local distributor: / Votre distributeur:

