

PROLB-18 Floor Model Proofer

Project _____

Item _____

Quantity _____



SIZE:

PROLB-18

40-3/8" High, 48-1/4" Wide, 31-15/16" Deep
1021 mm High, 1226 mm Wide, 812 mm Deep

NU-VU's PROLB-18 floor model are constructed of stainless steel inside and out. Each of these units features tempered glass doors for full view of your product. These units feature the AutoMist humidity system, which eliminates the need for a water pan; however, it does require a 1/4" waterline connection. This feature utilizes a mist, which is sprayed directly onto a fan that distributes the heat and humidity evenly throughout the proofer cavity.

The PROLB-18 has a capacity of 18 full size pans or 36 half-size pans.

CONSTRUCTION:

- Welded stainless steel
- Fully insulated
- Control panel accessible through front and side of unit
- Heating elements accessible inside of cabinet

CONTROLS:

- Mechanical controls
- Indicator light for thermostat
- Separate heat and humidity controls

STANDARD FEATURES:

- Stainless steel construction
- Heavy duty 3" casters
- Full view sliding glass doors
- AutoMist humidity system

OPTIONAL FEATURES:

- Warmer
- Set of 6" legs

LABORATORY CERTIFICATION AND APPROVAL




NU-VU® Food Service Systems

www.nu-vu.com
5600 13th Street
Menominee, MI 49858


1-800-338-9886 Toll Free
1-906-863-4401 Phone
1-906-863-5889 Fax

NU-VU® PROLB-18 Floor Model Proofer

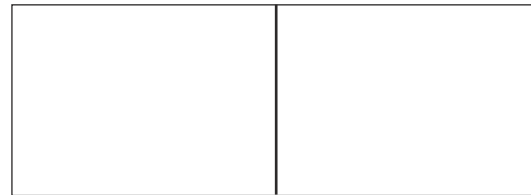


Approval / Stamp

PROLB-18 Floor Model Proofer

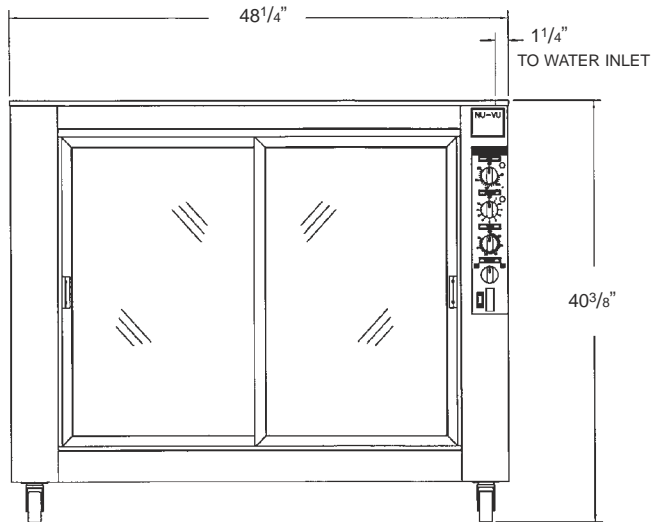

FRONT

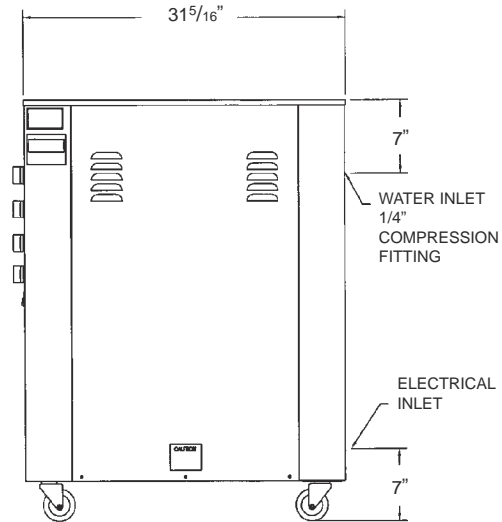

SIDE

SPECIFICATIONS:

ELECTRICAL:

SERVICE CONNECTIONS:

- Unit is shipped from factory to be hard wired on site. Single phase uses three-wire system. Three phase uses four-wire system.
- 208 or 240-Volt single or three phase is standard. Please specify at time of order.

ELECTRICAL:

Amp Draw	208/1	208/3	240/1	240/3
L1	9	6	8	5

WATER:

A 1/4" waterline connection is required. A water filtration system should be used to minimize mineral build-up.

LISTINGS:

The PROLB-18 has NSF & C-ETL-US listings.



INSTALLATION:

Allow four inches on each side and back of unit for ventilation of oven..

CAPACITY:

	18"x26" Sheet Pans	13"x18" Sheet Pans	Spacing
Proofer	18	36	3"

DIMENSIONS:

	Height	Width	Depth
Exterior	40-3/8"	48-1/4"	31-15/16"
Interior	27-5/8"	18-3/16"	29-1/2"

PACKING SIZE:

48" High, 60" Wide, 38" Deep
(1219 mm High, 1524 mm Wide, 965 mm Deep)

SHIPPING WEIGHT:

470 Pounds (213 Kg), FOB Menominee, MI 49858

NU-VU® PROLB-18 Floor Model Proofer