

Reach-in Refrigerators & Freezers

Q Series

• QR-1 • QR-2 • QR-1G • QR-2G
• QF-1 • QF-2



Standard Features

- Our "Q" series of reach-ins are designed with durability and strength that you will not find in any other products in its class.
- All stainless steel interior and exterior construction for a clean & safe food environment. Coved corner floor to meet NSF requirements.
- 22 gauge stainless steel door with full length recessed door handles; interior step design for added insulation and protection of door gasket to protect your long term investment.
- Refrigerators maintain product temperatures from 33° to 38°F / freezers: -10°F (QF-1), -8°F (QF-2), includes automatic defrost for the best temperatures in food preparation.
- Accepts all basic pan sizes including 18" x 26" bun pans.
- Optional: Universal pan rails to be able to accommodate (1) 18" x 26" bun trays, (2) 18" x 13" half bun trays or 12" x 20" foodservice pans (trays sold separately).
- Enhanced digital controller with Energy Savings feature refrigerators and freezers to keep food quality for longer period of time.
- 2-3/8" CFC-Free polyurethane insulation; foamed in place including our mullions on double doors for added strength and energy efficiency.
- Glass doors units are dual pane with aluminum frames and LED lighting for greater visibility of your products.

Options & Accessories

- 6" adjustable legs (set of 4)
- Epoxy coated shelves
- Factory reverse hinging
- Universal tray slides
- Stainless steel back panel
- 220 volts / 50 cycles / 1 phase



* Conforms to UL & NSF-7 standards

ISO-9001

Item # _____



QR(F)-1



QR(F)-2



QR-1G



QR-2G

Refrigerator	Model	Door	Capacity (Cu.Ft)	Shelves	Amps	HP	Voltage	Nema Plug	Cord Length	Cabinet Dimensions			Shipping	
										L	D	*H	Wt.	Cubes
	QR-1	1	24.5	3	5.6	1/4	115/60/1	5-15P	8'	27-1/2" (698.5 mm)	31" (789 mm)	79-1/2" (2019.3 mm)	295 (134 kg)	51 (1.44 m ³)
	QR-1G	1	24.5	3	6.0	1/4	115/60/1	5-15P	8'	27-1/2" (698.5 mm)	32" (813 mm)	79-1/2" (2019.3 mm)	315 (142.8 kg)	51 (1.44 m ³)
	QR-2	1	52	6	6.9	1/3	115/60/1	5-15P	8'	55-1/2" (1409.7 mm)	31" (789 mm)	79-1/2" (2019.3 mm)	475 (222.1 kg)	95 (2.69 m ³)
Freezer	QR-2G	1	52	6	7.3	1/3	115/60/1	5-15P	8'	55-1/2" (1409.7 mm)	32" (813 mm)	79-1/2" (2019.3 mm)	505 (229 kg)	95 (2.69 m ³)
	Model	Door	Capacity (Cu.Ft)	Shelves	Amps	HP	Voltage	Nema Plug	Cord Length	Cabinet Dimensions			Shipping	
										L	D	*H	Wt.	Cubes
Freezer	QF-1	1	24.5	3	8.5	3/4	115/60/1	5-15P	8'	27-1/2" (698.5 mm)	31" (789 mm)	79-1/2" (2019.3 mm)	295 (134 kg)	51 (1.44 m ³)
	QF-2	1	52	6	12.9	1	115/60/1	5-15P	8'	55-1/2" (1409.7 mm)	31" (789 mm)	79-1/2" (2019.3 mm)	475 (222.1 kg)	95 (2.69 m ³)

* Height does not include 4" castors (5" overall) or 6" for legs.

**All specifications are subject to change without notice

Specifications Q Series

Construction

Heavy duty stainless steel exterior front and sides. Aluminum top and galvanized back panel. Interior completely constructed of heavy duty stainless steel with coved cornered floor. Door is 22 gauge stainless steel exterior and stainless steel interior, step design with stainless steel hinged solid doors and positive seal. Provided with locks per section, magnetic door gaskets, removable without tools, self-closing and with 90° stay open feature. Recessed full length door handle. Door openings have a plastic breaker strips to retard condensate formation. Glass door units have a dual pane glass, thermal insulated with heavy duty aluminum frame and door handle. Unit comes complete with a 2-3/8" CFC-Free polyurethane insulation, foamed in place. Double door units have foamed in place mullions and air distribution channel.

Interior incandescent light with safety shield per section outside the food zone and activated by door rocker switch. Glass doors units have full height LED lighting along the side.

Refrigeration System

Self-contained capillary tube system using environmentally friendly (CFC Free) refrigerant. (R-134a refrigerator / R-404a freezers) Bottom mount condensing unit on a rail system for easy access. Evaporator coil is mounted to interior top panel encased in stainless steel. Large fan motor and fan blades for better air flow.

Refrigerators are designed to maintain temperatures between 33° F to 38°F and freezers 0°F to -10°F (QF-1), 0°F to -8°F (QF-2) during normal operations.

Energy savings digital controllers and thermostats. Automatic defrost, time initiated.

Shelving


(3) Epoxy coated shelving per door with channel slides for supports. Adjustable in 2" increments per shelf.

Others

Unit is supplied standard with a 8' cord and plug (Nema 5-15p). Standard 5" diameter casters, front 2 with brakes.

Warranty

(24) month labor and parts warranty. 5 year compressor warranty (Continental U.S.A. & Canada only).

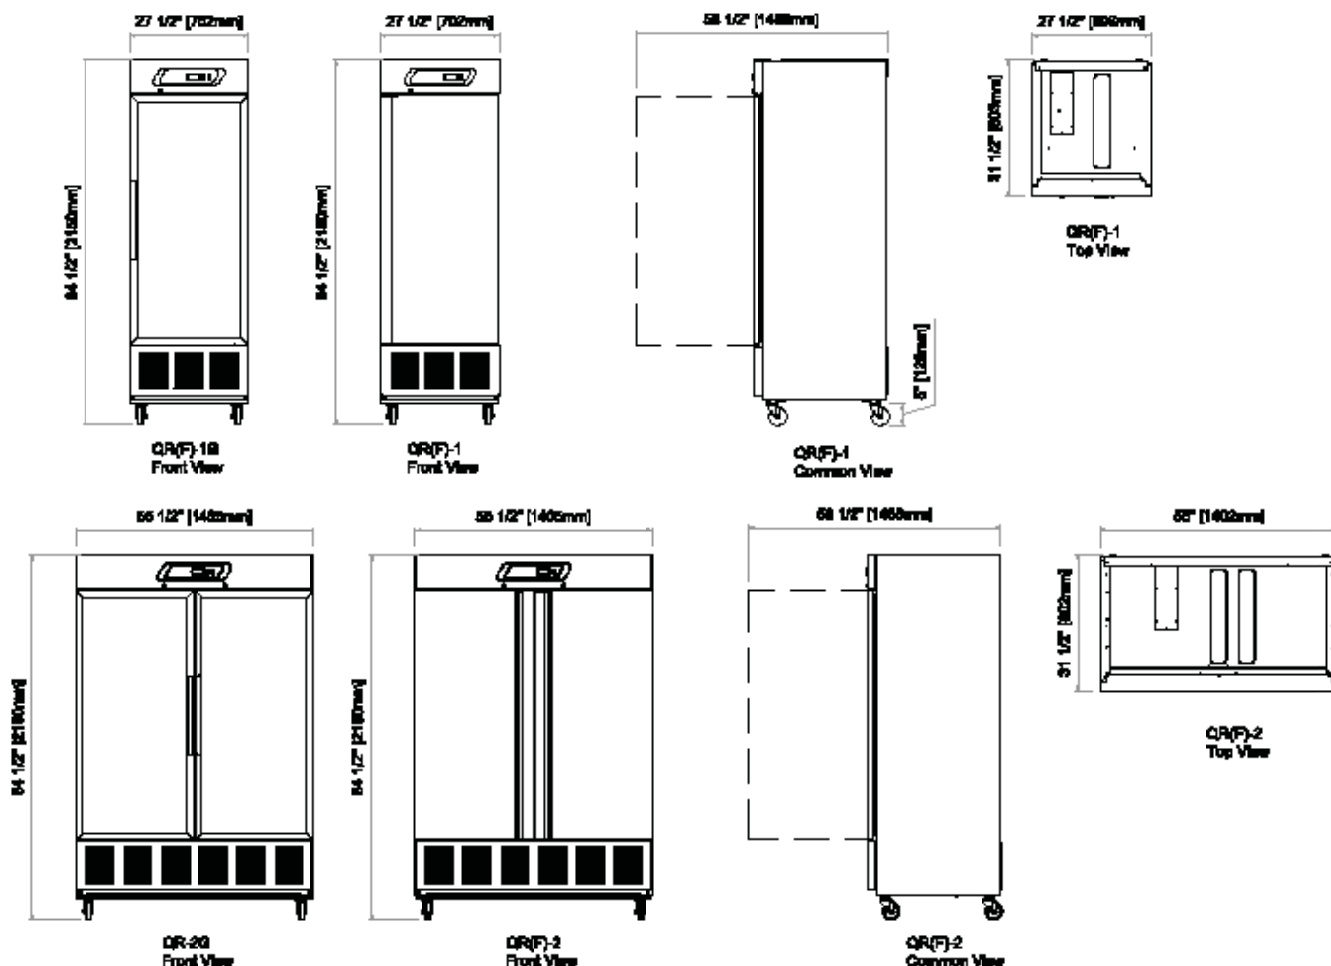

odify
tice.

Printed in the USA • 09/12