

SOLID DOOR REACH-IN REFRIGERATORS / FREEZERS

Project _____
 Location _____
 Item # _____
 Qty _____

Q SERIES

Models: QR-1 QF-1
 QR-2 QF-2

Standard Features

- Stylish "European Design" with "American Durability"
- 22 gauge heavy duty stainless steel doors with rounded corners and durable stainless steel hinges gives you the combination necessary to protect your long term investment.
- All stainless steel construction exterior and interior provides a cleaner and safer food environment.
- Accepts all basic pan sizes including 18" x 26" bun pans.
- Bottom mount refrigeration system so the compressor operates in the coolest, most grease free atmosphere of the kitchen. Service friendly with the condensing unit on pull out rails for easy access to all components. Space saver as you can store boxes on top of the unit.
- Door heaters are standard to handle more extreme environments.
- Self closing doors with stay open feature for convenient loading and unloading of product.
- Standard with 4" casters, front 2 with brakes.



QR-1 Shown



QR-2 Shown

Options and Accessories

- 6" adjustable legs (set of 4)
- Epoxy coated shelves (Clips included)
- Factory reverse hinging
- Bun tray rack - Full door
- Bun tray rack - Half door
- Stainless steel back panel
- 220 volts / 50 cycles / 1 phase



Conforms to UL and NSF-7 standards

REFRIGERATOR

| Model | Doors | Capacity (Cu. Ft.) | Shlvs. | Amps | HP | Voltage | NEMA Plug | Cord Length | Cabinet Dimensions | | | Shipping | |
|-------|-------|-------------------------------------|--------|------|-----|----------|--------------|----------------------------------|--|--------------------------------|---|----------|-------|
| | | | | | | | | | L | D | H | Wt. | Cubes |
| QR-1 | 1 | 23 <small>(651 liters)</small> | 3 | 6.8 | 1/3 | 115/60/1 | 5-15P | 10' <small>(3,048 mm)</small> | 28" x 31 1/2" x 83 3/4" <small>(711 mm) (800 mm) (2,127 mm)</small> | 295 <small>(134 kg)</small> | 51 <small>(1.44 m³)</small> | | |
| QR-2 | 2 | 49 <small>(1,388 liters)</small> | 6 | 8.3 | 1/2 | 115/60/1 | 5-15P | 10' <small>(3,048 mm)</small> | 55 1/4" x 31 1/2" x 83 3/4" <small>(1,404 mm) (800 mm) (2,127 mm)</small> | 475 <small>(216 kg)</small> | 95 <small>(2.69 m³)</small> | | |

FREEZER

| Model | Doors | Capacity (Cu. Ft.) | Shlvs. | Amps | HP | Voltage | NEMA Plug | Cord Length | Cabinet Dimensions | | | Shipping | |
|-------|-------|-------------------------------------|--------|------|-----|----------|--------------|----------------------------------|--|--------------------------------|---|----------|-------|
| | | | | | | | | | L | D | H | Wt. | Cubes |
| QF-1 | 1 | 23 <small>(651 liters)</small> | 3 | 8.7 | 1/2 | 115/60/1 | 5-15P | 10' <small>(3,048 mm)</small> | 28" x 31 1/2" x 83 3/4" <small>(711 mm) (800 mm) (2,127 mm)</small> | 295 <small>(134 kg)</small> | 51 <small>(1.44 m³)</small> | | |
| QF-2 | 2 | 49 <small>(1,388 liters)</small> | 6 | 13 | 3/4 | 115/60/1 | 5-15P | 10' <small>(3,048 mm)</small> | 55 1/4" x 31 1/2" x 83 3/4" <small>(1,404 mm) (800 mm) (2,127 mm)</small> | 475 <small>(216 kg)</small> | 95 <small>(2.69 m³)</small> | | |



Fagor Commercial, Inc.
 12800 N.W. 38th Avenue, USA
 Miami, FL 33054-4525
 Ph: (305) 779 - 0170 • Fax: (305) 779 - 0173




1-866- GO FAGOR


www.fagorcommercial.com

Q SERIES


SOLID DOOR REACH-IN REFRIGERATORS / FREEZERS

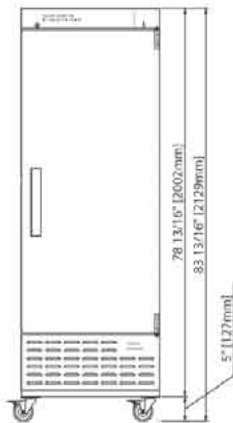


Elevation

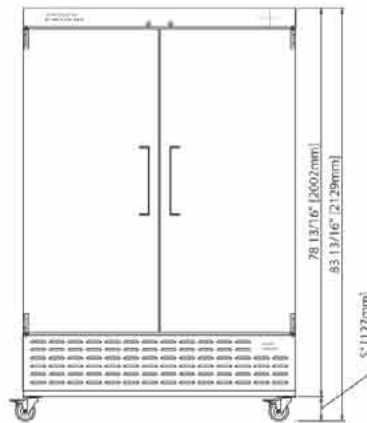


Elevation

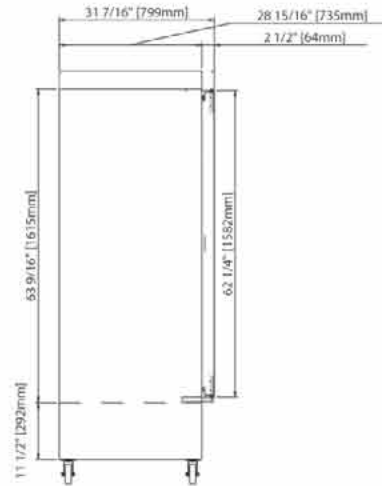

Section

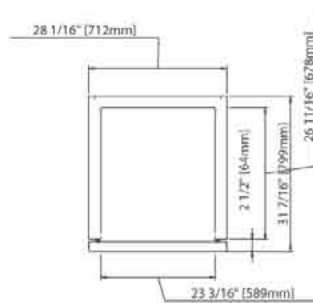

Plan View

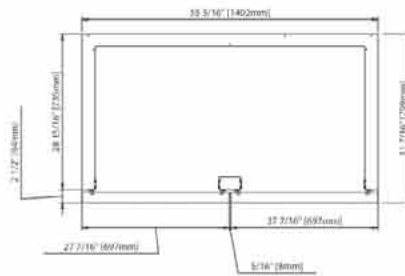

Plan View

SPECIFICATIONS

Construction: Heavy duty 22 gauge stainless steel exterior front and sides. Aluminum top and galvanized back panel. Interior completely constructed of heavy duty stainless steel with coved cornered floor.

Door is completely stainless steel interior and exterior with hinged solid doors and positive seal. Provided with locks per section, magnetic door gaskets, removable without tools, self closing and with stay open feature. Recessed door handle. Door heaters provided on all solid door reach-in s. (1) Set on Refrigerated units and (2) sets on Freezers. Door openings have a plastic breaker strips to retard condensate formation.

Unit comes complete with a 2-3/8" CFC-Free polyurethane insulation, foamed in place. Three adjustable epoxy coated shelves provided per section.

Interior incandescent light with safety shield per section outside the food zone and activated by door rocker switch.

Refrigeration system: Self contained capillary tube system using environmentally friendly (CFC Free) refrigerant. (R-134a refrigerator / R-404a freezers) Bottom mount condensing unit on a rail system for easy access. Evaporator coil is mounted to interior top panel encased in stainless steel. Large fan motor and fan blades for better air flow.

Refrigerators are designed to maintain temperatures between 33° F to 38° F and freezers between 0° F to -7° F during normal operations.

Digital display thermometers and analog controllers on refrigerated units. Digital display and controllers on freezers. Automatic defrost, time initiated.

Others: Unit is supplied standard with a 10 cord and plug (Nema 5-15p). Standard 4" diameter casters, front 2 with brakes.

Warranty: One year labor and parts warranty. 5 year compressor warranty (Continental U.S.A. only).



Fagor Commercial, Inc.
12800 N.W. 38th Avenue, USA
Miami, FL 33054-4525
Ph: (305) 779 - 0170 • Fax: (305) 779 - 0173

www.fagorcommercial.com

The manufacturer reserves the rights to modify materials and specifications without notice. Printed in the USA • 01/07