

SOLID & GLASS DOOR REACH-IN REFRIGERATORS/FREEZERS



Project _____
 Location _____
 Item # _____
 Qty _____

Q SERIES

Models:

- QR-1 QR-2 QR-1G QR-2G
 QF-1 QF-2 QF-1G

Standard Features

- New enhanced digital controller and display with built in Energy Saving features during off peak hours. Door alarm.
- Stainless steel exterior and interior finish. S/S coved corner floor.
- 22 gauge stainless steel door; interior step design.
- CFC-Free polyurethane insulation - foamed in place.
- Oversized and balanced refrigeration system (R-134A Refrigerators / R-404A Freezers. Holds 33° F – 38° F Refrigerators / -8° F Freezers).
- Channel shelving system with rails for greater flexibility. Accepts all basic pan sizes including 18" x 26" bun pans.
- Self closing doors stay open feature for convenient loading and unloading of products.
- Adjustable heavy duty epoxy coated wire shelves.
- 4" diameter swivel castors standard, front 2 with brakes.
- Bottom mount refrigeration system with service friendly slide out rail.



QR(F)-1 Shown



QR-1G shown



QR(F)-2 Shown



Conforms to UL and NSF-7 standards

REFRIGERATOR

Model	Doors	Capacity (Cu.Ft)	Shlvs.	Amps	HP	Voltage	NEMA Plug	Cord Length	Cabinet Dimensions			Shipping	
									L	D	H*	Wt.	Cubes
QR-1	1	24.5 (694 litres)	3	4.7	1/3	115/60/1	5-15P	8' (2.439mm)	27-3/4" (686 mm)	31" (787 mm)	78-7/8" (1.978 mm)	295 (134 Kg)	51 (1.44 m ³)
QR-2	2	52 (1473 litres)	6	6.9	1/2	115/60/1	5-15P	8' (2.439mm)	55-1/4" (1.708 mm)	31" (787 mm)	78-7/8" (1.978 mm)	475 (222.1 Kg)	95 (2.69 m ³)
QR-1G	1	24.5 (694 litres)	3	4.7	1/3	115/60/1	5-15P	8' (2.439mm)	27-3/4" (686 mm)	31" (787 mm)	78-7/8" (1.978 mm)	315 (142 Kg)	51 (1.44 m ³)
QR-2G	2	52 (1473 litres)	6	6.9	1/2	115/60/1	5-15P	8' (2.439mm)	55-1/4" (1.708 mm)	31" (787 mm)	78-7/8" (1.978 mm)	505 (229 Kg)	95 (2.69 m ³)

FREEZER

Model	Doors	Capacity (Cu.Ft)	Shlvs.	Amps	HP	Voltage	NEMA Plug	Cord Length	Cabinet Dimensions			Shipping	
									L	D	H*	Wt.	Cubes
QF-1	1	24.5 (694 litres)	3	8.0	1/2	115/60/1	5-15P	8' (2.439mm)	27-3/4" (686 mm)	31" (787 mm)	78-7/8" (1.978 mm)	295 (134 Kg)	51 (1.44 m ³)
QF-2	2	52 (1473 litres)	6	11.2	1	115/60/1	5-15P	8' (2.439mm)	55-1/4" (1.708 mm)	31" (787 mm)	78-7/8" (1.978 mm)	475 (222.1 Kg)	95 (2.69 m ³)
QF-1G	1	24.5 (694 litres)	3	8.0	1/2	115/60/1	5-15P	8' (2.439mm)	27-3/4" (686 mm)	31" (787 mm)	78-7/8" (1.978 mm)	315 (142 Kg)	51 (1.44 m ³)

* Height does not include 4" castors (5" overall) or 6" optional legs.



Fagor Commercial, Inc.

13105 N.W. 47th Avenue
 Miami, FL 33054 USA

Ph: (305) 779 - 0170 • Fax: (305) 779 - 0173


Toll Free: 1 - 866 - GO FAGOR




www.fagorcommercial.com

Q SERIES


SOLID DOOR & GLASS DOOR REACH-IN REFRIGERATORS/FREEZERS

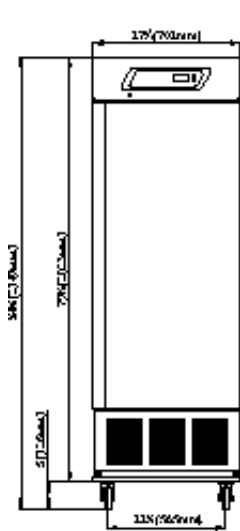


QR(F)-1 FRONT

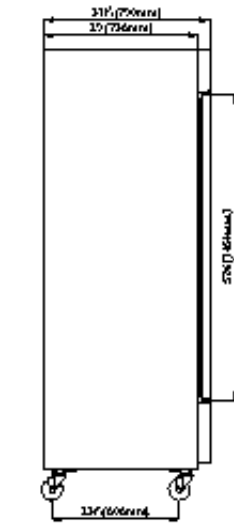


QR(F) SECTION

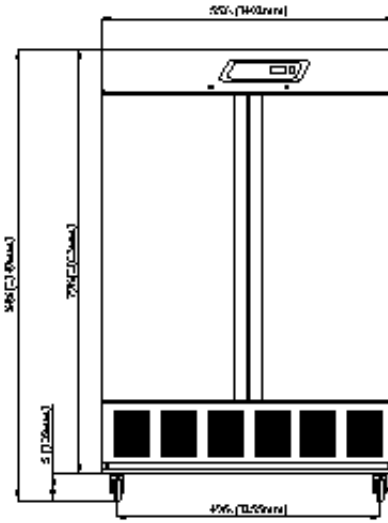


QR(F)-2 FRONT

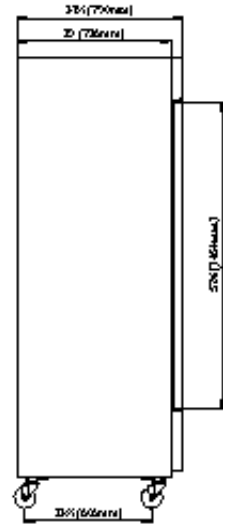

QR(F) SECTION



QVR(F)-1 TOP

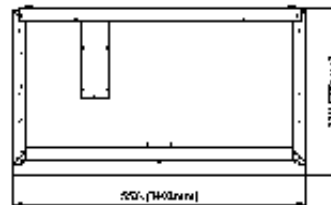

QVR(F)-2 TOP

SPECIFICATIONS

Construction: Heavy duty stainless steel front and sides. Aluminized top and back panel. Interior constructed of Stainless Steel interior walls and coved corner stainless steel floor.

Door is 22 gauge stainless steel exterior and interior; step design with S/S hinged solid doors and positive seal. Provided with locks per section, magnetic door gaskets, removable without tools, self closing and with 90° stay open feature. Recessed door handle. Door heaters on freezers. Door openings have a plastic breaker strips to retard condensate formation.

Unit comes complete with 2-3/8" CFC-Free polyurethane insulation, foamed in place. Three adjustable epoxy coated shelves provided per section. Interior fluorescent light activated by door rocker switch.

Glass door units have interior incandescent light with safety shield per section outside the food zone.

Refrigeration system: Self contained capillary tube system using environmentally friendly (CFC Free) refrigerant. (R-134a refrigerator / R-404a freezers) Bottom mount condensing unit on a rail system for easy access. Epoxy coated evaporator coil is mounted to interior top panel encased in stainless steel. Large fan motor and fan blades for better air flow.

Refrigerators are designed to maintain temperatures between 33°F to 38°F and freezers between 0°F to -10°F (QVF-1), 0°F to -8°F (QVF-2) during normal operations.

Enhanced digital display and controllers on both refrigerators and freezers. Automatic defrost, time initiated. Energy savings feature during off peak hours.

Others: Unit is supplied standard with a 8' cord and plug (Nema 5-15p). 4" diameter castors, front 2 with brakes.

Warranty: One year labor and parts warranty. 5 year compressor warranty (Continental U.S.A. and Canada only).

Accessories:

- 6" adjustable legs (set of 4)
- Epoxy coated shelves with supports
- Factory reverse hinging
- S/S back panel
- Universal pan rails
- Shelf supports
- Bun tray rack - Half door
- Bun tray rack - Full door
- 220 volts / 50 cycles / 1 phase



Fagor Commercial, Inc.

13105 N.W. 47th Avenue
Miami, FL 33054 USA

Ph: (305) 779 - 0170 • Fax: (305) 779 - 0173

Toll Free: 1 - 866 - GO FAGOR

www.fagorcommercial.com

The manufacturer reserves the rights to modify materials and specifications without notice.
Printed in the USA • 05/10