



Quote

07/25/2023


To:
 Cuda Zoo
 Zachary Barber
 3320 NE 32nd St.
 Fort Lauderdale, FL 33308
 954-565-5330
 954-565-5506 (Contact)

Project:
 Cuda Zoo
 3320 NE 32nd St.
 Fort Lauderdale, FL 33308

From:
 Hoshizaki Southeastern D.C.
 Alex Perez
 10125 NW 116 Way
 Miami, FL 33178 suite 1
 Cell (305) 401-2091
 Fax (305) 883-3228
 Office (305) 888-7600
 e mail: aperez@hoshizaki.com

Project Code: 117995

Job Reference Number: 117995

| Item | Qty | Description | List Each | Discount | Net Each | Net Total |
|-------------------------|------|---|-------------|----------|------------|-------------------|
| <u>1</u> | 1 ea | REACH-IN REFRIGERATOR  Hoshizaki Model No. R1A-FSL Steelheart Series Refrigerator, reach-in, one-section, 23.1 cu. ft., top mounted self-contained refrigeration system, (3) epoxy coated wire shelves, (1) full-height solid left hinged door, digital temperature display/controls, LED interior lighting, stainless steel exterior front & sides, stainless steel interior, (4) 4" heavy duty casters (2 with brakes), R290 Hydrocarbon refrigerant, 1/4 HP, cord, NEMA 5-15P, cETLus, ETL-Sanitization, ENERGY STAR® | \$10,560.00 | 50/10/21 | \$3,754.08 | \$3,754.08 |
| | 1 ea | Warranty: 5-Year labor on entire machine | \$0.00 | | \$0.00 | \$0.00 |
| | 1 ea | Warranty: 6-Year parts on entire machine | \$0.00 | | \$0.00 | \$0.00 |
| | 1 ea | Warranty: 7-Year parts on compressor | \$0.00 | | \$0.00 | \$0.00 |
| | 1 ea | 115v/60/1-ph, 5 amps, standard | \$0.00 | | \$0.00 | \$0.00 |
| | 1 ea | Casters, 4" (set of 4), field installed, standard | \$0.00 | | \$0.00 | \$0.00 |
| | | Class 150 Weight: 350 lbs total | | | | |
| Total for item 1 | | | | | | \$3,754.08 |
| Grand Total | | | | | | \$3,754.08 |

Prices Good Until: 08/29/2023

Acceptance: _____ Date: _____

Printed Name: _____

Project Grand Total: \$3,754.08



R1A-FS(L)

One Section Full Stainless Door Refrigerator

STEELHEART



R1A-FS(L)
09/28/22
Item # 13512

W x D x H
27.5" x 33.5" x 79.5"*
*with 4" casters



Dimensions / Capacity

One Section R1A-FS(L)

| | |
|---------------------------------------|-----------------------|
| Interior Storage Capacity (CF) (AHAM) | 23.10 ft ³ |
| Overall Width x Depth | 27.5" x 33.5" |
| Height (including 4" casters) | 79.5" |
| Door Opening Width x Height | 21.75" x 59.25" |
| Depth with Door Open at 90° | 59.25" |
| Adjustable Shelves | 3 |
| Shelf Dimensions (W x D) | 21.25" x 26" |
| Crated Shipping Weight | 345 lbs |
| Crated Length x Depth x Height | 37.5" x 31.5" x 81" |

Electrical / Refrigeration

One Section R1A-FS(L)

| | |
|--------------------------------------|-----------------|
| Voltage | 115/60/1 |
| HACR Breaker | 15.0 Amps |
| Electrical Connection (NEMA) | 5-15P (1) |
| Voltage Range | 104-126 |
| Ambient Temp. Range | 45° to 100°F |
| Control Setpoint Range | 31° to 52°F |
| Amperage | 5 |
| Energy Consumption (kWh/day) @ASHRAE | 1.25 |
| Heat Rejection (BTU/Hr.) @NSF | 317 |
| Approx. Nominal Compres. BTU/HR (HP) | 770(1/4HP) |
| Refrigerant / Charge Amount (oz) | R290 / (4.6 oz) |

Options

- Additional epoxy shelves
 Stainless steel shelves
 Tray/Pan slides
 Foot pedal door opener
 6" Adjustable legs
 Condensate pan (HS-5462)

Warranty

- * 3 Year - parts and Labor on entire machine.
 5 Year - Parts on Compressor
 Valid in United States, Canada, Puerto Rico and U.S. Territories. Contact factory for warranty in other countries.

Item #: _____
Project: _____
Qty: _____
AIA#: _____

Features

- ▶ **Maximum interior storage capacity with smallest external footprint**
- ▶ **Stainless steel interior with stainless steel exterior front, sides and top**
- ▶ **Unique ducted air distribution system**
 - Energy efficient interior LED light
 - Environmentally friendly R290 hydrocarbon refrigerant
 - Solid state digital controller with temperature alarms and LED display (Fahrenheit or Celsius)
- Cabinet and doors are insulated with 2-3/8" of CFC free, foamed in place polyurethane
- Stainless steel exterior and interior door come standard with locks
- Exclusive stepped door design to protect recessed door gasket
- Spring assisted self-closing doors with stay open feature
- Sturdy 8 gauge stainless steel hinge plate with welded hinge pin
- Extruded aluminum flush mount door handle
- Field reversible doors
- Evaporator coils are epoxy electrocoated (E-Coat) to help fight corrosion
- Energy efficient automatic hot gas condensate evaporator
- Top mount refrigeration comes standard with a condenser filter
- Refrigerant flow is controlled with thermostatic expansion valve
- Stainless steel shelf supports
- (3) epoxy coated wire shelves are standard
- Standard with 4" casters (two with brakes)
- Stackable (two units high) to conserve warehouse floor space
- 10 ft. cord and plug

Hoshizaki reserves the right to change specifications without notice.



R1A-FS(L)


One Section Full Stainless Door Refrigerator

STEELHEART




R1A-FS(L)
09/28/22
Item # 13512


FRONT VIEW

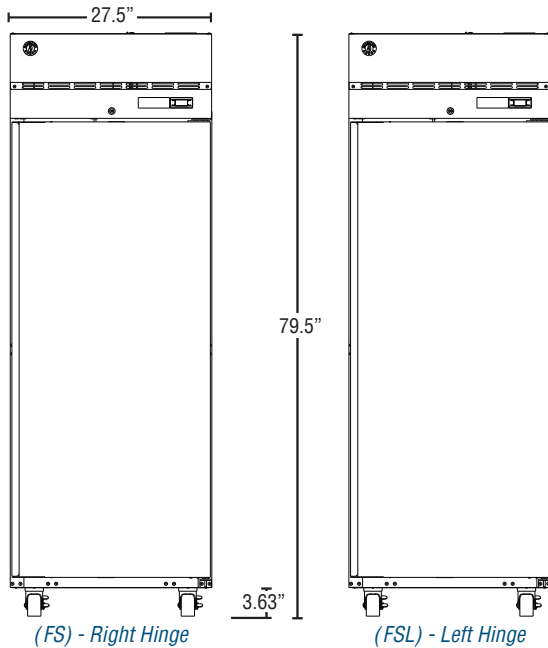

SIDE VIEW

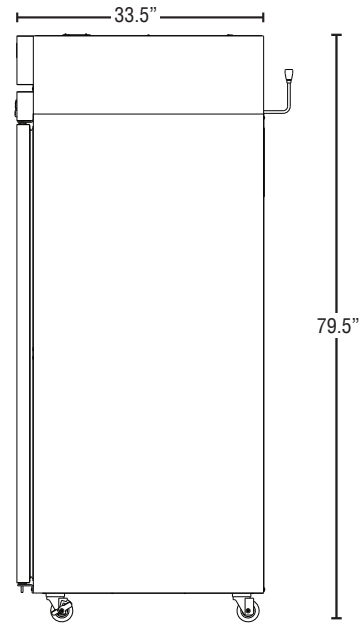

PLAN VIEW

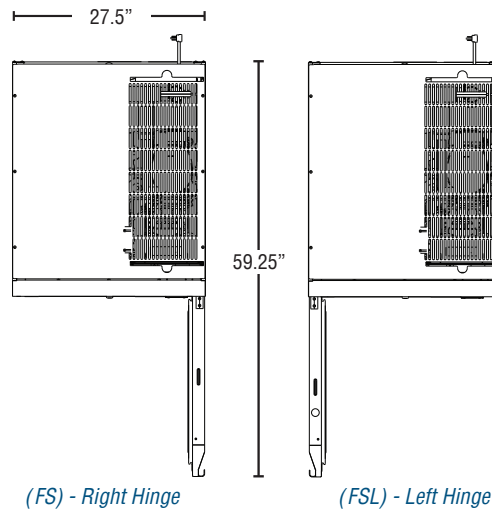

Cabinet Construction

The exterior cabinet front, sides, and top are constructed of high quality stainless steel. The exterior back, and bottom are constructed of coated steel. The cabinet interior is constructed of stainless steel with a unique ducted air flow system. Three (3) heavy duty epoxy coated shelves per section are standard. Mounted on stainless steel pilasters shelves are adjustable in 1" increments. Cabinet walls and doors are insulated with 2-3/8" of environmentally friendly, CFC free, foamed in place polyurethane. An interior LED light is automatically activated when doors are opened. 4" polyolefin, casters (two with brakes) are standard.

Door Construction

Doors are constructed of a high grade stainless steel exterior and interior and are standard with locks. Hoshizaki's exclusive "stepped" design protects the recessed gasket while product is being removed from the cabinet. Doors are provided with a one piece, full length extruded aluminum flush mount handle and are mounted on eight (8) gauge stainless steel hinge plates with a welded hinge pin. Spring assisted self-closing doors are equipped with a stay open feature past 90 degrees. Snap-in magnetic door gaskets are easily removed for cleaning. Door hinging is field reversible.

Refrigeration System

The high efficiency refrigeration system is self-contained with an epoxy electrocoated (E-Coat) evaporator for extended life. Top mounted refrigeration system is easily accessible for service and includes a condenser filter with easy access from the top of the unit. The refrigeration system components are assembled on a high density expanded polypropylene platform that is removable from the main unit. A unique ducted air flow system achieves uniform air distribution within the cabinet to eliminate hot spots. Condensate removal is accomplished with a top mounted energy efficient non-electric evaporation system. A thermostatic expansion valve (TXV) controls the flow of environmentally friendly R290 refrigerant through the evaporator. Refrigeration system utilizes a time initiated off cycle defrost to eliminate any ice on the evaporator coil. Solid state digital controls monitor the operation and performance of the refrigeration system. The controls also provide visual high and low temperature and high and low voltage alarms. A LED display shows the cabinet temperature and is adjustable to Fahrenheit or Celsius. 115 volt units are equipped with a ten foot cord and plug (20.0 amps or less).