

EXTERIOR

- Acero Inox AISI 304 18/10
- Respaldo en chapa galvanizada

INTERIOR

- Acero Inox AISI 304 18/10
- Desagüe interior
- Fondo embutido con amplios radios
- Iluminación LED
- Parrillas de alambre de acero plastificado (600x800), regulables en altura y fácilmente desmontables
- Marcos puerta calefactados para evitar acumulación de hielo (BT)
- Capacidad para 54 cubetas de helado de 5 L. (BT) (no incluido)

AISLAMIENTO

- Poliuretano inyectado alta presión libre de CFC's densidad 40 kg/m³, bajo GWP y cero efecto ODP

PUERTAS

- Contrapuerta embutida
- Burlete de triple cámara fácilmente sustituible
- Puertas con tirador integrado
- Bisagra pivotante con bloqueo de apertura

PATAS

- Patas en acero inox regulables en altura hasta 200 mm

REFRIGERACIÓN

- Sistema de refrigeración compacto Monobloc, INFRIBLOCK
- Evaporadores tratados anticorrosión 100% Poliéster
- Bandeja evaporativa
- Control temperatura final del desescarche
- Desescarche por gas caliente (BT)

CONTROL DIGITAL

- Táctil por membrana a 30 amp.

OPCIONAL / OPTIONAL

- Parrilla / Wire shelves 80x60 (502X57)
- Bandeja helados 5 L. / 5 L. ice cream tray (501X32)
- Juego de guías / Slides (503X62; 503X63)
- Cerradura / Lock (506X120)

EXTERIOR

- AISI 304 18/10 stainless steel
- Galvanized steel back

INTERIOR

- AISI 304 18/10 stainless steel
- Internal drain
- Sealed interior floors and rounded cabinet corners
- LED Lighting
- Plastic coated Wire shelves (600x800), adjustable height and easy removal
- Heated door frame to avoid accumulation of ice (BT)
- Capacity of 54 ice cream 5 L. trays (BT) (not included)

INSULATION

- Free CFC's high density (40kg/m³) polyurethane insulation with low GWP & zero ODP effect

DOORS

- Stamped rear door
- Easy removal triple chamber gasket
- Integrated handle doors
- Self closing doors with stay open feature

LEGS

- Stainless steel adjustable legs up to 200 mm

REFRIGERATION

- Compact refrigeration system Monobloc
- Evaporator coil coated with anti-corrosion material 100% Polyester
- Evaporative tray
- Control of the final defrost temperature
- Hot gas defrost (BT)

DIGITAL CONTROL

- Touch membrane 30 amp.



MODELOS MODELS	→ ↗ ↑ Dimensiones Dimensions LxPxH (mm)	⏻ Potencia Power (W)	⚡ Electrica Electrical (V/Hz)	📦 Capacidad Capacity (L)	🚪 Puertas Doors	📏 Nº parrillas / J. guías No shelves / Slides	🔧 Compresor Compressor (HP)	🛒 Consumo Consumption (kWh/24h)	💧 Evaporación Evaporation	🌡️ Régimen T _{RA} (38°C)	🧊 Desescarche Defrost	🕒 Control Control	❄️ Refrigerante Refrigerant
AGB 901	756x960x2130	475	220/50	848	1	6/6 (600x800)	3/8	2,62	Forzada Forced	-2°C/+8°C	Automático Automatic	Digital 30 AMP	R 134 a
AGB 901 BT	756x960x2130	1425	220/50	848	1	6/6 (600x800)	1	11,29	Forzada Forced	-22°C/-28°C	Automático Automatic	Digital 30 AMP	R 404 A

Características técnicas y constructivas sujetas a variación sin previo aviso / We reserve the right to change specifications without prior notice.

Armario de refrigeración y congelación 800x600 heladería pastelería Euronorma 900 L.
Euronorm pastry ice cream 800x600 refrigerator and freezer reach in 900 L.




I INFRIBLOCK  **LED**

03 Armarios




AGB 901

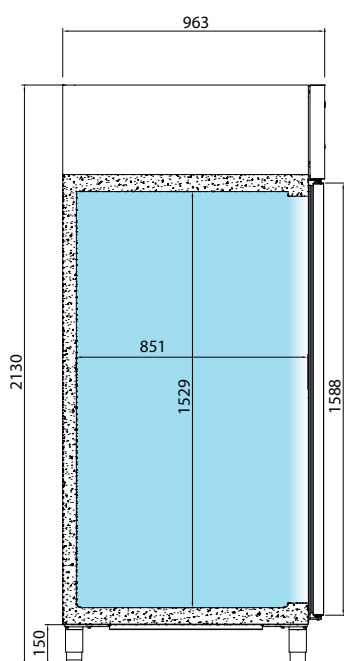

AGB 901

Precio · Price €



AGB 901 AGB 901 BT