



REACH-IN BOTTOM-MOUNT SERIES FREEZERS



› FEATURES

- CFC free refrigerant and foam insulation
- Electronic thermostat and digital LED temperature display for accurate control and easy reading
- 3 adjustable, heavy-duty epoxy coated wire shelves per door
- Condensate heating element built into condensate pan for efficient evaporation of excess water
- Freezer doors have integral factory installed heating element to eliminate condensation
- Easy to mount 4" casters (lockable in front) are standard with all units
- Locking doors on all units. KB27F door swing is field reversible.
- Self-closing doors that remain open at 90 degrees
- Magnetic gasket can be replaced without any tools
- Exterior: 430 stainless steel, door & front panel: 202 stainless steel.
- Interior: 304 stainless steel
- Temperature: 0 to -10°F / -17 to -23°C
- Electrical: 115/60/1 with NEMA 5-15P plug • KB81F DV: 115/208-230/60/1 with NEMA L14-20P plug

› SPECIFICATIONS

MODEL	DOORS	EXT. DIMENSIONS W x D x H (in)	INT. DIMENSIONS W x D x H (in)	AMPS	H.P.	SHIP WEIGHT
KB27F	1	26.8 x 32.7 x 82.3	22.2 x 27.6 x 50.2	11	5/8	329 lbs
KB54F *	2	53.9 x 32.7 x 82.3	49.4 x 27.6 x 50.2	12	1	501 lbs
KB81F DV	3	81.0 x 32.7 x 82.3	76.4 x 27.6 x 50.2	8	1 1/4	625 lbs




CERTIFIED TO ANSI/NSF-7 STANDARDS



Head Office : 5659 Royalmount Ave., Montreal, Qc, Canada H4P 2P9
 TEL: (514) 737-9701 • TOLL FREE: (888) 275-4538
 FAX: (514) 342-3854 • TOLL FREE FAX: (877) 453-8832

US Sales Office : 12000 Biscayne Blvd, Suite 108, Miami, FL 33181
 TEL: (786) 600-4687 • TOLL FREE: (844) 218-8477 • FAX: (786) 661-4100
 mvpgroupcorp.com • sales@mvpgroupcorp.com



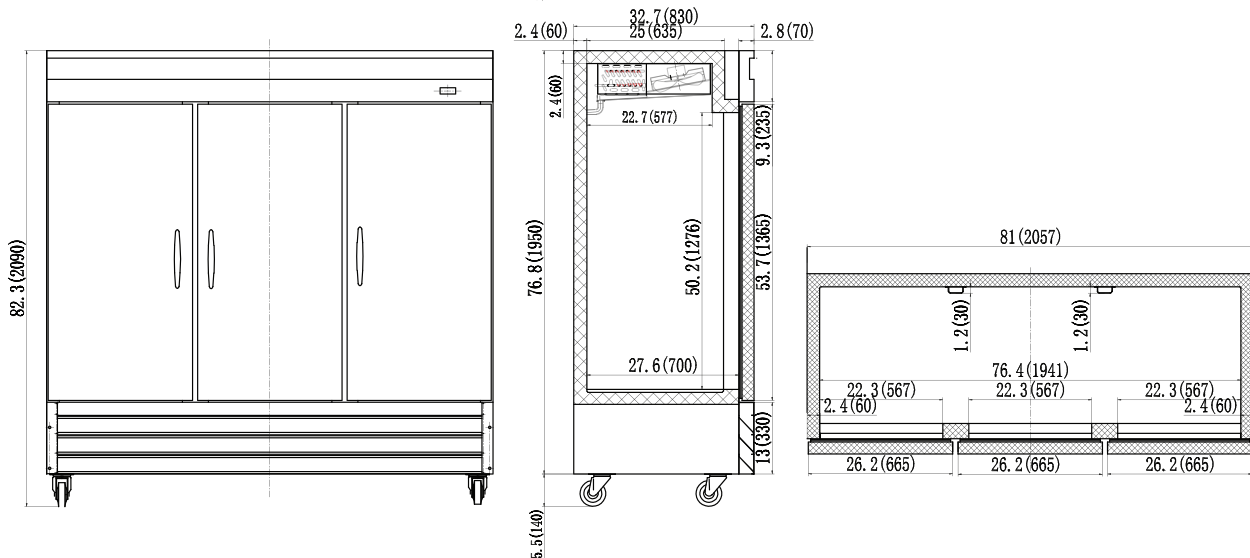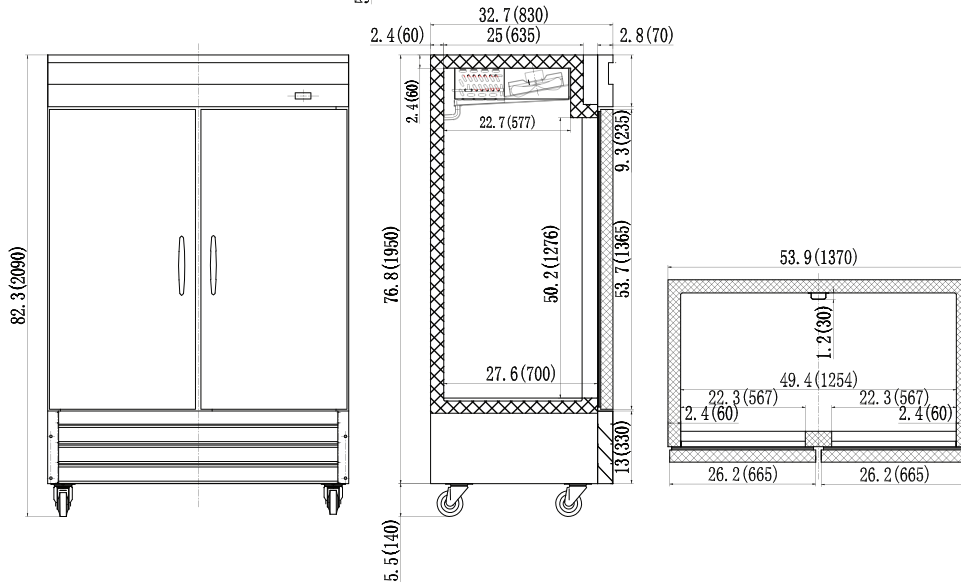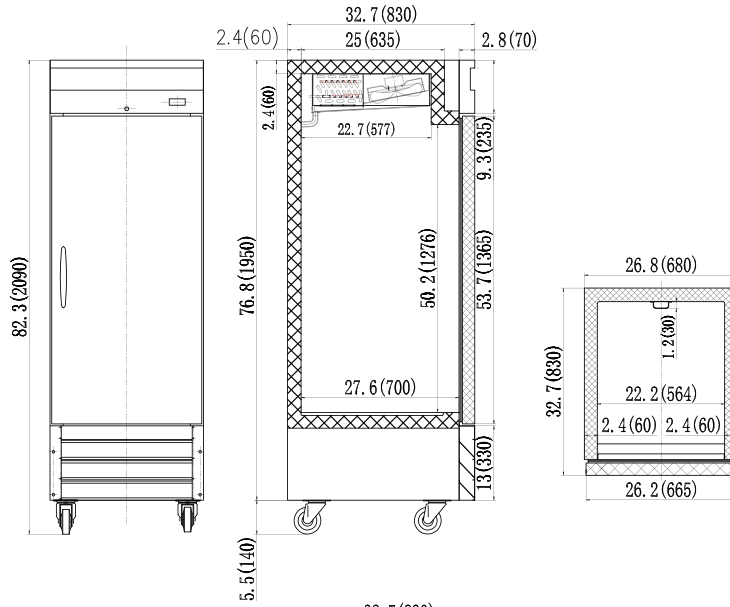

Dimensions in inches (mm)