



› FEATURES

- CFC free refrigerant and foam insulation
- Electronic thermostat and digital LED temperature display for accurate control and easy reading
- Easy to mount 4" casters (lockable in front) are standard with all units
- Self-closing doors that remain open at 90 degrees
- Magnetic gasket can be replaced without any tools
- Adjustable, heavy-duty epoxy coated wire shelves (one per door)
- Stainless steel framework construction
- Auto defrosting and auto evaporation of condensation water
- 1/3 x 4" PC pans & 14.9" PE cutting board included
- * Unit can be custom-ordered with 6" PC pans
- Exterior: 430 stainless steel top, front & sides. Aluminum back panel & galvanized bottom
- Interior: 304 stainless steel floor, ABS sides & door backs. Aluminum back panel
- Temperature: 33 to 41°F / 0.5 to 5°C
- Electrical: 115/60/1 with NEMA 5-15P plug

› SPECIFICATIONS

MODEL	DOORS	EXT. DIMENSIONS W x D x H (in)	INT. DIMENSIONS W x D x H (in)	AMPS	H.P.	SHIP WEIGHT
KPP44	1	47.4 x 32.3 x 41.7	25.7 x 27.3 x 24.2	7	1/2	329 lbs
KPP67	2	70.8 x 32.3 x 41.7	49.1 x 27.3 x 24.2	7.5	1/2	435 lbs
KPP93	3	94.2 x 32.3 x 41.7	72.6 x 27.3 x 24.2	9	3/4	565 lbs




› OPTIONS - DRAWERS *

KPP44-2D • KPP67-2D • KPP67-4D • KPP93-2D • KPP93-4D • KPP93-6D

See page 34 for pan configurations for units with drawers.

*Available by custom order only. Please contact our Sales Department for availability and lead time.

CERTIFIED TO ANSI/NSF-7 STANDARDS

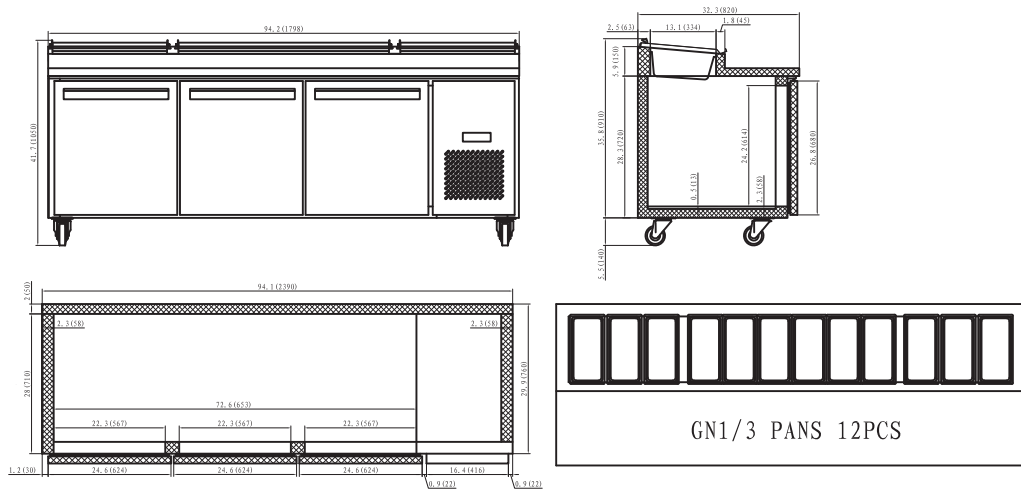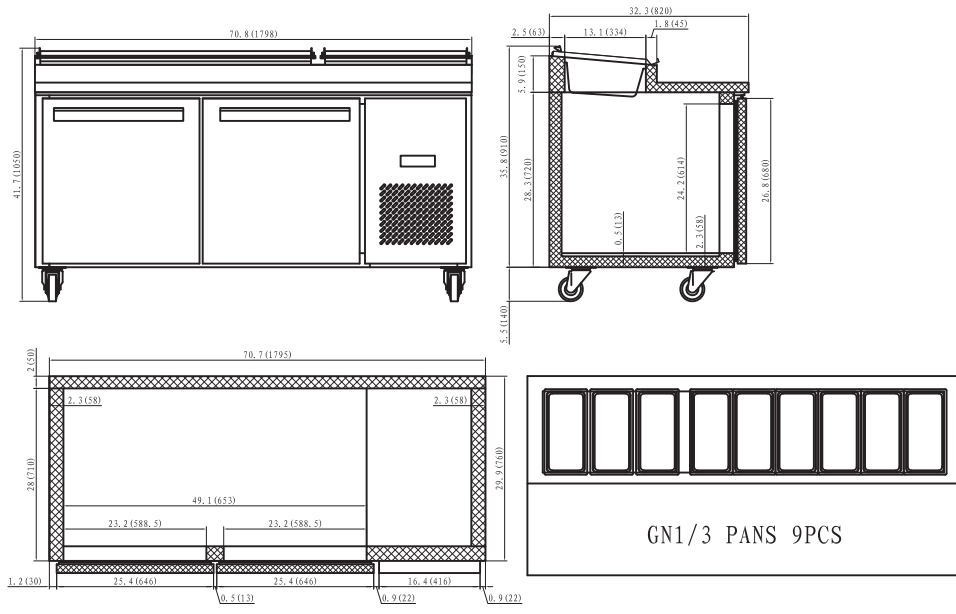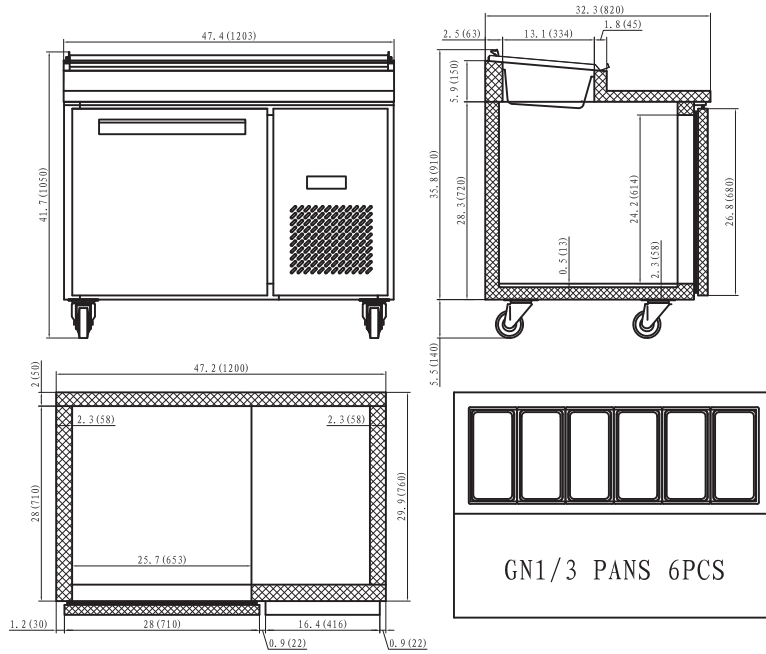

Dimensions in inches (mm)