

Triple Door Series
Refrigerator & Freezer
Top Mount Compressor

KTSR-3 / KTSE-3



Project name :	
Location :	
Item :	Qty :
Model :	

Durable Design

- Stainless steel interior & exterior
- 3 height adjustable, heavy-duty, PE coated wire shelves per section
- LED interior lighting
- Digital temperature display
- Door locks with keys
- Simple plug-in installation


Energy Efficient

- Self-closing door with 2 steps stay open feature
- Seals tight with magnetic vinyl gasket
- Open door alert beeps when door is open for 5 minutes
- Foamed-in place high-density polyurethane insulated body, CFC-Free
- Large evaporator & condenser for quick cooling and greater efficiency
- Single door units are field reversible



Superior Quality

- Designed for mobility, reliability & efficiency in commercial kitchens
- Certified with ETL (both) & Energy Star (freezer only) guaranteeing quality standards and energy efficiency
 - 4" heavy duty, locking front
 - Easy grip handle
- Entirely self-contained system
 - Automatic defrost system
- Digitally controlled temperature system
 - Accommodates full-size bun sheet pans
 - Easily adjustable shelf height
- Includes Bleeder Valve to release the negative pressure in the storage room.
 - Internal storage capacity is 72 cu.ft.
- NEMA 5-20 plug (Refrigerator) or NEMA L14-20P (Freezer)
 - Compressor : Refrigerator - 5/8 HP / Freezer - 1 HP
- Holding temperature : Refrigerator 28°F to 39°F / Freezer 5°F to -9.4°F

KTSR-3 / KTSE-3

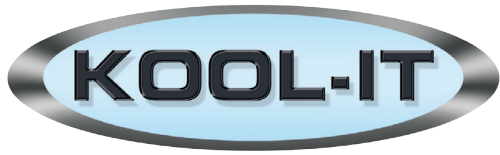

KTSR-3 / KTSF-3

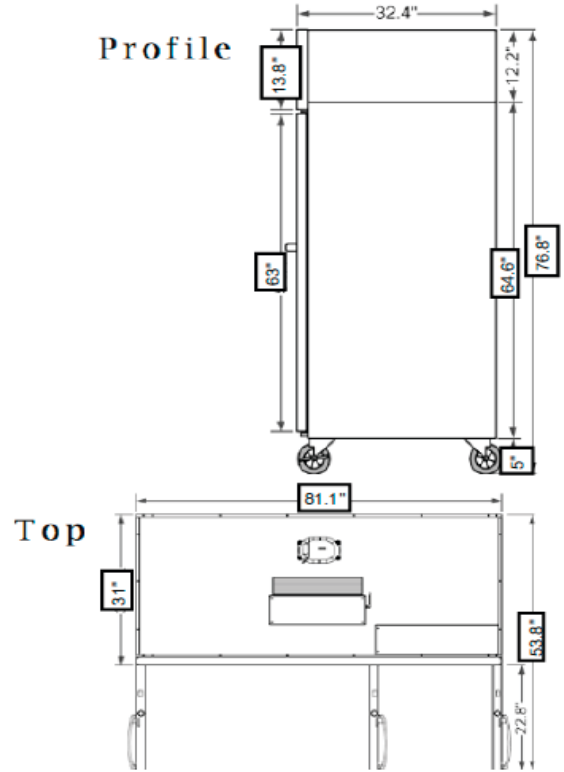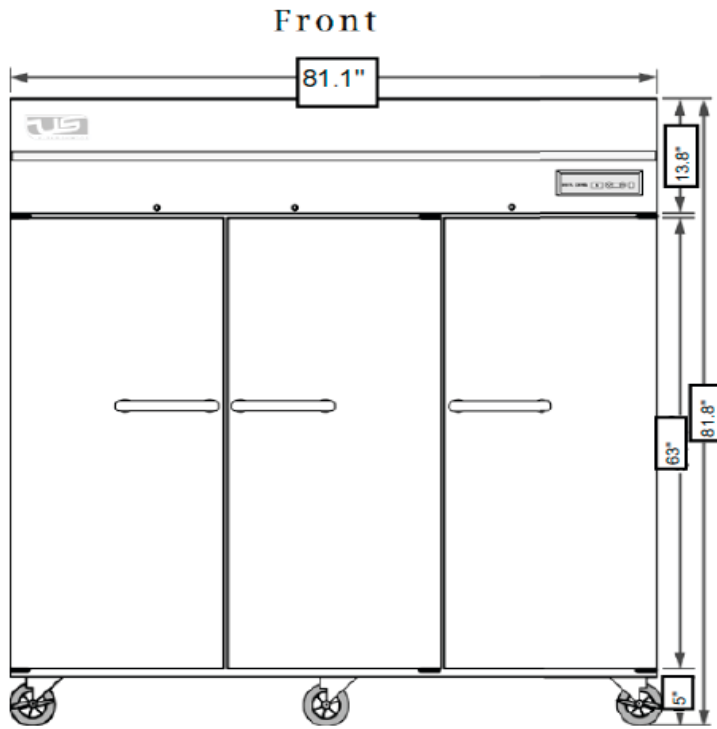

Model Number	Description	Interior/Exterior Material	Number of Doors	Number of Shelves	Capacity (cubic feet)	Exterior Dimensions (WxDxH in.)	Compressor Size	Voltage/Frequency	Amps	Working Temp.	Refrigerant	Ship Weight (lbs.)
KTSR-3	Top Mount Triple Door Refrigerator	Stainless Steel	3	9	72	81.1 x 31.0 x 81.8	5/8	115V 60 Hz	12.5	28°F to 39°F	R134a	567
KTSF-3	Top Mount Triple Door Freezer	Stainless Steel	3	9	72	81.1 x 31.0 x 81.8	1	Dual power : 115V / 208-230V 60 Hz	10.5	5°F to -9.4°F	R404a	595

These units are designed for maximum performance in an air-conditioned area of 75°F ambient temperature and 55% relative humidity. There must be adequate ventilation at the top, sides & rear of the unit for proper operation.

Warranty : 18 months parts & labor. Additional 42 months on compressor (part only)



KOOL-IT is a registered trade mark of MVP Group.
Specifications subject to change without notice.



Tel.: 514.737.9701 / Toll Free: 888.275.4538
 Fax: 514.342.3854 / Toll Free: 877.453.8832
 sales@mvpgroupcorp.com www.mvpgroupcorp.com