NOR-LAKE, INCORPORATED
727 Second Street
Hudson, Wisconsin 54016

800-955-5253
715-386-2323
866-961-5253 Parts
800-388-5253 Service
715-386-4291 FAX
www.norlake.com

NORLAKE®

ADVANTEDGE™ SOLID DOOR BACK BAR REFRIGERATORS

NLBB69

PROJECT:
.....

ITEM NUMBER:
.....

MODEL NUMBER:
.....

SOLID DOOR BACK BAR REFRIGERATORS

SPECIFICATIONS FOR: NLBB59, NLBB69, NLBB79, NLBB95

- Finish: Heavy duty stainless steel top and black vinyl coated steel exterior front, sides and back. Galvanized steel interior walls with stainless steel floor.
- Insulation: Foamed-in-place 1-1/2” CFC-free polyurethane insulation
- Hardware: Solid doors with locks, magnetic door gaskets, plastic breaker strips around door openings to limit the formation of any condenstation. Two adjustable epoxy coated shelves per door section standard. Interior LED light.
- Electrical: 115 volt, 60 Hz, 1 phase with cord and NEMA 5-15P plug
- Refrigeration: Self-contained forced air R-134a capillary tube refrigeration system. Temperature range from +34°F to +38°F. Adjustable temperature control.
- Approvals: ETL Sanitation listed, UL, C-UL Safety listed, approved to NSF standard for packaged food products **

STANDARD FEATURES

- Adjustable temperature control
- Black vinyl coated steel front, sides and back exterior
- Epoxy coated shelves with clips
- Free flowing air system at all times to ensure uniformly cooled product
- LED interior light
- Slide out condensing unit
- Temperature range: +34°F to +38°F
- ETL Sanitation listed, UL, C-UL Safety listed, approved to NSF standard for packaged food products **
- Warranties: 3 year parts & labor, 5 year compressor

OPTIONAL FEATURES*

- 4” plate casters
- Floor racks
- Shelves with product guides

*Most options are available one week from receipt of order. Please contact us for specific questions.
** C-UL is Underwriters Laboratories Safety Certification Mark which indicates that UL has tested the equipment to applicable CSA Standards.
** UL Sanitation is Underwriters Laboratories Sanitation Mark which indicates that UL has tested the equipment to applicable NSF Standards.

SPECIFICATION GUIDE



FRONT
NLBB69



FRONT
NLBB59



TOP
NLBB59



SIDE
ALL MODELS



TOP
NLBB69



FRONT
NLBB79



TOP
NLBB79

SPECIFICATIONS

Models	***NLBB59***	***NLBB69***	***NLBB79***	***NLBB95***
Crated Weight (lbs) (kg)	276 (125)	298 (135)	400 (182)	460 (209)
Crated Height (in) (cm)	43-1/2 (111)	43-1/2 (111)	43-1/2 (111)	43-1/2 (111)
Crated Width (in) (cm)	61-1/2 (156)	71-1/4 (181)	82-5/8 (210)	97-5/8 (248)
Crated Depth (in) (cm)	30 (76)	30 (76)	30 (76)	30 (76)
Interior Height (in) (cm)	32 (81)	32 (81)	32 (81)	32 (81)
Interior Width (in) (cm)	54-3/4 (139)	64-3/4 (165)	76-1/2 (194)	91 (231)
Interior Depth (in) (cm)	21-1/2 (55)	21-1/2 (55)	21-1/2 (55)	21-1/2 (55)
Overall Height (in) (cm)	37 (94)	37 (94)	37 (94)	37 (94)
Overall Width (in) (cm)	59 (150)	69-1/8 (176)	80-3/4 (205)	95-1/4 (242)
Overall Depth (in) (cm)	28-7/8 (73)	28-7/8 (73)	28-7/8 (73)	28-7/8 (73)
Gross Cubage (CuFt) (L)	19.4 (549)	23.4 (663)	27.9 (790)	33.6 (951)
Number of Shelves	4	4	6	6
Shelf Area (SqFt) (Sqm)	14.1 (1.31)	16.9 (1.57)	19.8 (1.84)	22.6 (2.1)
Condensing Unit Size	1/5 HP	1/3 HP	1/3 HP	3/8 HP
Refrigerant	R-134a	R-134a	R-134a	R-134a
Electrical Characteristics	115/60/1	115/60/1	115/60/1	115/60/1
Cord and Plug Furnished	Yes	Yes	Yes	Yes
NEMA Plug Configuration	5-15P	5-15P	5-15P	5-15P
Total Amp Draw	3.3	5.0	6.0	6.3
12 oz. Can Capacity	1084	1299	1566	1875
12 oz. Bottle Capacity	498	594	714	858

Specifications subject to change without notice.

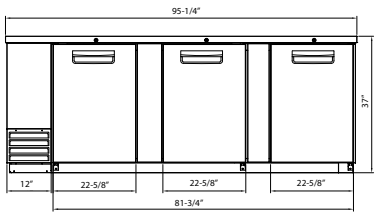

FRONT
NLBB95

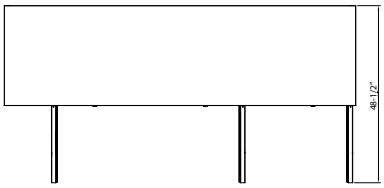

TOP
NLBB95

NORLAKE®

Standex
Food Service Equipment Group

Revision Date: 05/15
©2015 NOR-LAKE, INC.
Printed in the U.S.A.
Part Number: 143584