



ADVANTEDGE™ GLASS DOOR REFRIGERATOR



NLGR70H-B

PROJECT:

ITEM NUMBER:

MODEL NUMBER:

GLASS DOOR REFRIGERATOR

SPECIFICATIONS FOR: NLGR70H-B

- **Finish:** White painted steel interior. Black painted steel exterior.
- **Insulation:** 2" foamed-in-place polyurethane insulation.
- **Hardware:** Four adjustable heavy duty vinyl-coated shelves (with product label strips) per door. Adjustable legs for leveling. Top panel backlit by fluorescent lights. Self closing doors with hold open feature. Interior fluorescent lights to illuminate product.
- **Door:** Three door merchandiser is standard with swing style doors ,and has siver doors.
- **Electrical:** 115 volt, 60 Hz, 1 phase with cord and plug.
- **Refrigeration:** Complete bottom mounted refrigeration system with a copper tube, aluminum fin coated evaporator. The condensate is collected and automatically evaporated from an energy efficient air over wick style vaporizer. Drain line is recessed in cabinet back. Refrigerant flow is controlled by a capillary tube. R-134a refrigerant. Temperature range: +34°F to +38°F
- **Approvals:** UL, C-UL and ETL Sanitation **

Note: This equipment is intended for storage and display of non-potentially hazardous bottled or canned products only.

STANDARD FEATURES

- Air cooled condensing unit
- Automatic condensate vaporizer
- Automatic defrost
- Capillary tube system
- Cord and plug
- Door hold open feature
- Magnetic gaskets
- White painted steel interior
- Black painted steel exterior
- Swing style door
- Top backlit panel
- UL, C-UL and ETL sanitation
- Vinyl coated shelves
- Warranties: 3 year parts & labor, 5 year compressor

OPTIONAL FEATURES*

- Additional shelves
- White painted steel exterior




Nor-Lake, Inc.
Registered to ISO 9001:2008
File No. 10001816


* Most options are available two weeks from receipt of order. Please contact us for specific questions.

** C-UL is Underwriters Laboratories Safety Certification Mark which indicates that UL has tested the equipment to applicable CSA Standards.


** UL Sanitation is Underwriters Laboratories Sanitation Mark which indicates that UL has tested the equipment to applicable NSF Standards.

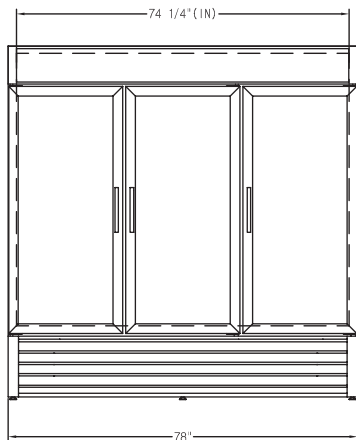

FRONT VIEW
NLGR70H-B

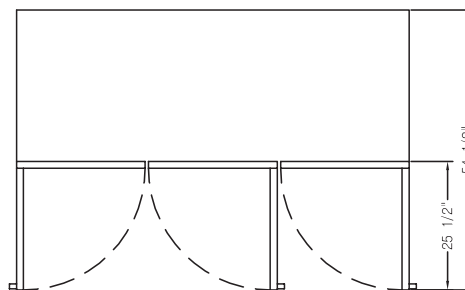

TOP VIEW
NLGR70H-B

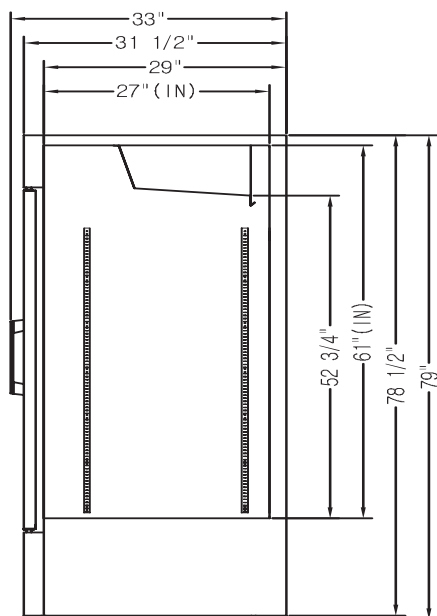

SIDE VIEW
NLGR70H-B

SPECIFICATIONS

<i>Models</i>	<i>NLGR70H-B</i>
<i>Crated Weight (lbs) (kg)</i>	696 (313)
<i>Crated Height (in) (cm)</i>	85-1/2 (214)
<i>Crated Width (in) (cm)</i>	78-3/8 (196)
<i>Crated Depth (in) (cm)</i>	34-1/4 (86)
<i>Interior Height (in) (cm)</i>	61 (153)
<i>Interior Width (in) (cm)</i>	74-1/4 (186)
<i>Interior Depth (in) (cm)</i>	27 (68)
<i>Overall Height (in) (cm)</i>	79 (198)
<i>Overall Width (in) (cm)</i>	78 (195)
<i>Overall Depth (in) (cm)</i>	33 (83)
<i>Gross Cubage (CuFt) (L)</i>	70 (175)
<i>Number of Shelves</i>	12
<i>Shelf Area (SqFt) (Sqm)</i>	69.4 (6.45)
<i>Number of Legs</i>	6
<i>Condensing Unit Size</i>	3/5 HP
<i>Refrigerant</i>	R-134a
<i>Electrical Characteristics</i>	115/60/1
<i>Cord and Plug Furnished</i>	Yes
<i>NEMA Plug Configuration</i>	5-15P
<i>Total Amp Draw</i>	11.9

Specifications subject to change without notice.



NORLAKE[®]