PITCO®

Model PFW-1 & PFW-2 Food Warmers

Project _____

Item No. _____

Quantity _____

STANDARD SPECIFICATIONS

CONSTRUCTION

- Rugged, easy to clean stainless steel and aluminum housing.
- Specifically designed reflector directs heat away from element to provide better coverage of food.
- Fiberglass insulated hood minimizes heat loss.
- PFW-1 (Built-in) features high energy ceramic radiant heating element with 750watts of power. Post mounted food warmer is mounted to the bread-and batter cabinet. Swing away design allows for the unit to be moved out of the way or swing away if hit.
- PFW-2 (Free Standing) features a long life metal sheath element rod with 500 watts of power. Stand alone design allows the unit to be placed on the side shelf of a model 14 or larger Pitco Frialator.

CONTROLS

- Up front ON/OFF switch for easy activation.

OPERATIONS

- ON/OFF switch controls power to the heating element.

MODELS

- Built-in model (PFW-1) 750 watt

- Free standing model (PFW-2) 500 watt

AVAILABLE OPTIONS & ACCESSORIES

- ☐ None necessary

APPROVALS

- CE Listed
- NSF Listed
- MEA Approved
- UL Listed

C E   NSF®   (UL)®

Model PFW-1 & PFW-2 Food Warmers

Model PFW-1 (Built-In)
750 WATT

6ft (182.9 cm) long HPN Cord and plug
(NEMA 5-15P) (NOTE 1)

6
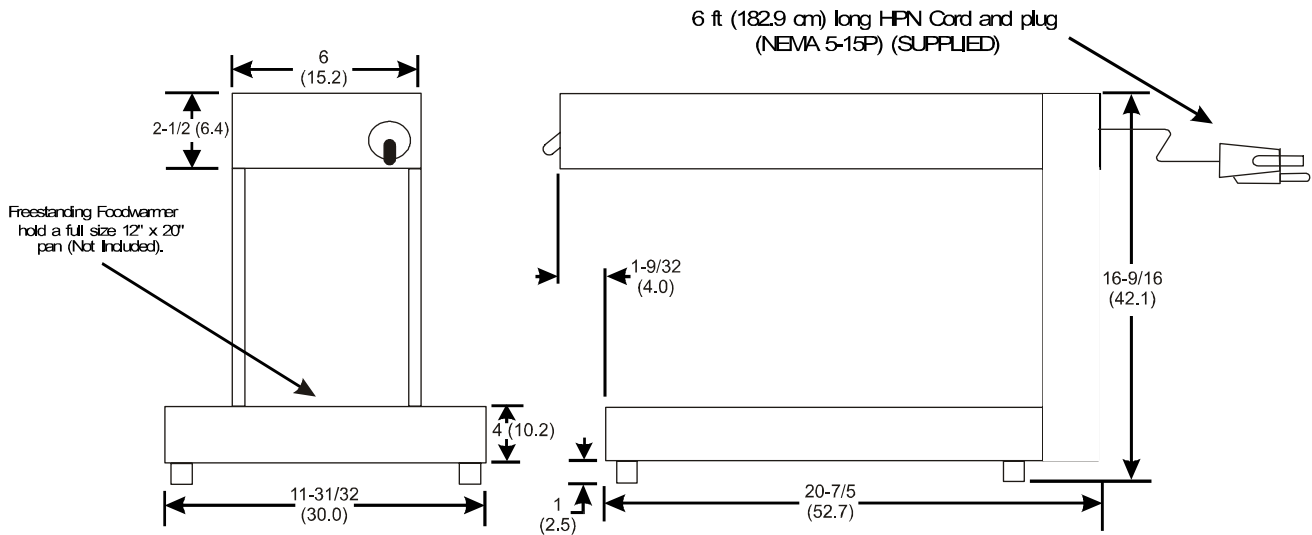(15.2)

24
(61.0)

2-1/2 (6.4)

16-1/2
(41.9)

14
(35.6)

12-3/8
(31.4)
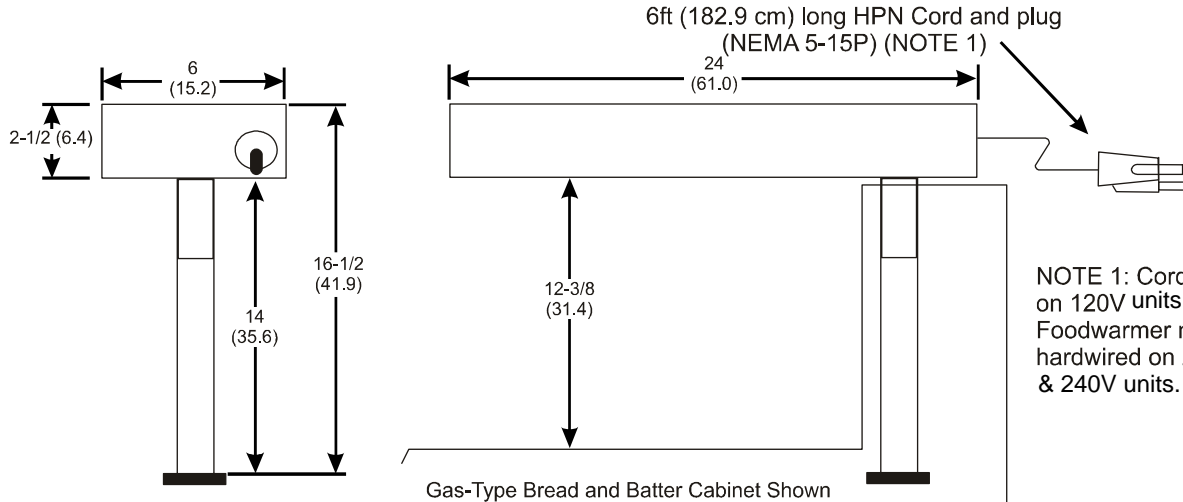
NOTE 1: Cord supplied
on 120V units only.
Foodwarmer must be
hardwired on 208V
& 240V units.

INCHES
CENTIMETERS

Gas-Type Bread and Batter Cabinet Shown

Model PFW-2 (Free Standing)
500 WATT

6 ft (182.9 cm) long HPN Cord and plug
(NEMA 5-15P) (SUPPLIED)

6
(15.2)

2-1/2 (6.4)

Freestanding Foodwarmer
hold a full size 12" x 20"
pan (Not Included).

1-9/32
(4.0)

16-9/16
(42.1)

4 (10.2)

11-31/32
(30.0)

1
(2.5)

20-7/5
(52.7)

ELECTRICAL

Model	VOLTAGE / PHASE / HZ	
	120 / 1 / 60	240 / 1 / 50
	AMPS / EA	AMPS / EA
PFW-1 (750 watt)	6.3	3.6 / 3.1
PFW-2 (500 watt)	4.2	N/A

SHIPPING INFORMATION

16 Pounds (7.3 KG) / 3.83 cubic feet (0.11) cubic meters)

PERFORMANCE CHARACTERISTICS

Specify designed infrared reflecting system maintains food at peak temperature without overcooking.

SHORT FORM SPECIFICATION

Provide Pitco Model PFW-1 or PFW-2 Pitco-Matic Food Warmer. Food warmer will be built-in or free standing. Heating element hood shall be insulated with fiberglass to minimize heat loss. Heat deflector design shall focus radiated heat to provide equalized heat to prevent overheating. Provide accessories as follows:

TYPICAL APPLICATION

Provide a heat source for holding fried foods at a "just cooked" temperature.