

# SOMERSET®

Tel: 978.667.3355

800.772.4404

Fax: 978.671.9466

Email: somerset@smrset.com

[www.smrset.com](http://www.smrset.com)



## DOCKING DOUGH ROLLER

## CDR-2020

*Our all-in-front, compact  
PIZZA ROLLER.*

*Docks your dough up to  
18" (46cm) in diameter  
and sheets dough up to  
20" within seconds.*

*Ideal for round or  
elongated dough  
that needs to be  
docked*

### HIGHLIGHTS:

- Sheets 500-600 pcs. per hour
- Ships standard with synthetic, non-stick rollers
- Ergonomic design makes it easy and simple to operate
- Sheets dough to a uniform thickness in seconds
- All stainless steel construction offers safety, sanitation, speed, simplicity, durability, and low cost



SOMERSET INDUSTRIES, INC. • 1 ESQUIRE ROAD • NORTH BILLERICA, MA 01862 • U.S.A.

### FEATURES

- Simple handle adjustments for exact uniform dough thickness
- Spring loaded scrapers readily removable for easy cleaning
- Safety sensors for automatic shutoff
- Compact design, ideal for use in limited space
- Ergonomic design for easy operation
- Large hopper accepts large pieces of dough
- Maintenance free drive mechanism
- Drive mechanism isolated from roller area
- Sanitary, heavy duty, all stainless steel welded construction
- Safe, simple, easy to operate, easy to clean
- Simple, adjustable docking mechanism
- Easy to mount or remove from docker




### INDUSTRY USES

- Pizzerias
- Restaurants
- Institutions
- Schools
- Mexican establishments
- Other ethnic food production
- Cafes
- Bakeries

### SPECIFICATIONS

(Specifications subject to change without notice)

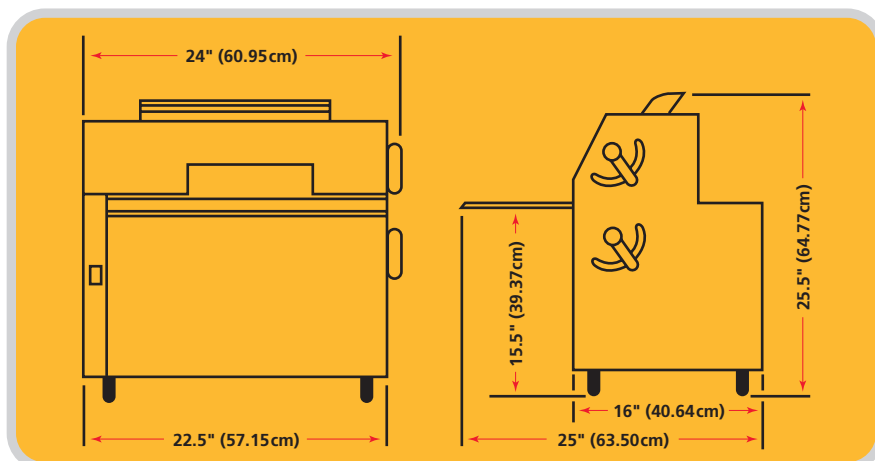

**Rollers:** 3.5" dia. by 20" length  
(8.89 cm dia. 50.80 cm length)

**Scrapers:** Synthetic, Spring Loaded, Removable

**Bearings:** Sealed Ball Bearings, Permanently Lubricated

**Gear Motor:** Heavy Duty 3/4 HP, Single Phase, Maintenance Free, 115v/60Hz or 220v/50Hz

**Finishing:** All Stainless Steel

**Legs:** 4" Adjustable, Stainless Steel

**Shipping Weight:** 218lbs (98.88kgs)

PATENT PENDING



APPROVED

MADE IN THE U.S.A. 05.10.12