

Project _____

Item Number _____

Quantity _____

Multi-Purpose Oven



Multi-Purpose Gastro Oven

Models:

- MPG5TE - 5 Tray
- MPG10TE - 10 Tray



Bakery Oven

Features:

- Touch screen control panel with multiple user programs
- Internal lighting for easy product viewing
- Baking chamber is made in stainless steel and features rounded corners for easier cleaning and better air flow
- Comes with 1 core probe
- Double glass panel with low heat emission and easy disconnect for easy cleaning
- Carbon fiber handle is light and strong
- Reversing motors with heat resistant bearings
- Doors feature condensation catching trays
- Convection baking from 158 to 572° fahrenheit (70 to 300° celsius)
- Steam baking from 158 to 266° fahrenheit (70 to 130° celsius)
- Multiple cooking methods: steam, convection, dry, and probe

Tray Size:

- GN 1/1

Warranty:

- One year, on-site parts and labor

Optional Accessories:

- Stand
- Multi-point probe
- External probe for vacuum
- Automatic washing system


Univex Corporation



WE RAISE THE BAR. WE SET THE STANDARD.

Multi-Purpose Gastro Oven

ELECTRIC

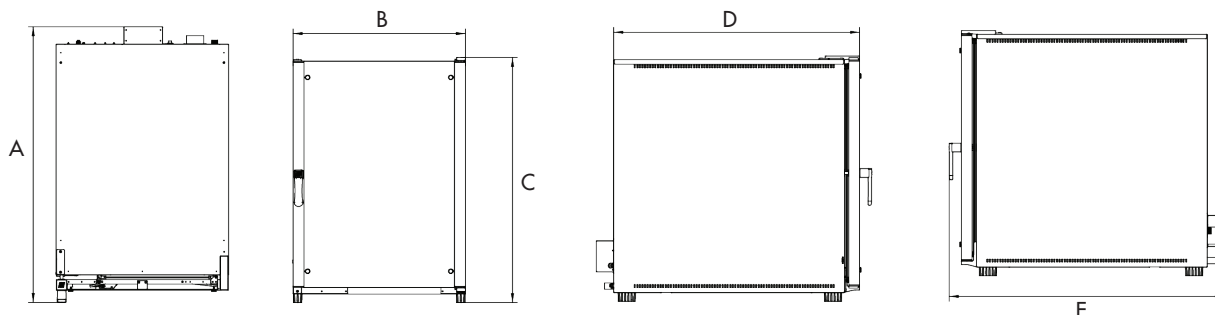


Line drawing is the MPG10TE

*The water needs to be filtered and softened with a hardness of 3.5 - 7 G/Gal

	MPG5TE	MPG10TE
A	48 7/8" (124.1cm)	50 1/2" (128cm)
B	31 1/2" (80cm)	31 1/2" (80cm)
C	27 1/4" (68.9cm)	44 7/8" (113.9cm)
D	45" (114.3cm)	45" (114.3cm)
E	48 7/8" (124.1cm)	50 3/8" (127.9cm)

If washing system is in place, there is another water connection.

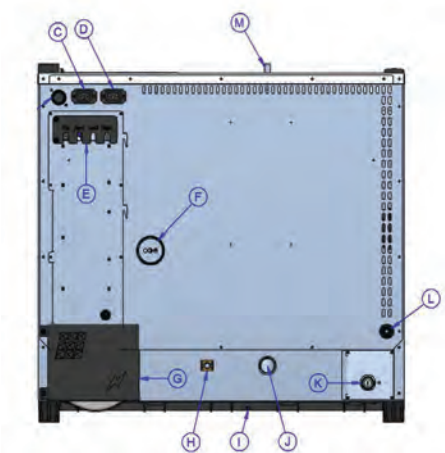

C	Extracting hood supply and control
D	Steam condenser supply and control
E	Connections for accessories and optional equipment
F	Baking chamber steam exhaust
G	Access to electric supply terminal block
H	Equipotential terminal
I	Drain for the water collection tray
J	Drain for baking chamber liquids
K	Water inlet 3/4" (1.9cm)
L	Inlet for oven washing kit
M	Depressurizer (only for gourmet models)

Minimum clearance away from the wall: left side-2" (5cm), right side-4" (10cm), rear-6" (15cm)

Distance needed away from wall to be cleaned and serviced: 20" (50.8cm)

Optional Stand Height: 11" (28cm), 24" (61cm), 39.4" (100cm)

Plug Info: Hard Wire With Shutoff

Water: 7-43 PSI

Oven Weight	
MPG5TE	110.2lbs. (50kg)
MPG10TE	176.4lbs. (80kg)

Electrical Information (60Hz)		
Model	Standard Voltage/Phase/Amps	Optional Voltage/Phase
MPG5TE	208-240/3/12.8-13.4	400/3
MPG10TE	208-240/3/25.7-26.8	400/3



Univex Corporation
www.Univexcorp.com

3 Old Rockingham Rd
Salem, NH 03079
United States of America

TEL: (800)258-6358
INTL TEL: (603)893-6191
FAX: (800)356-5614
INTL FAX: (603)893-1249