

Cleaning & Maintenance – Tea

Regular cleaning of your tea brewer and containers will maintain the highest quality iced tea your equipment is capable of producing.

1. Turn off the unit at the ON/OFF button, on the front control panel.
2. Wipe exterior surfaces with a damp cloth, removing spills and debris.
3. Clean the sprayhead and dome plate area.
 - a. Remove the sprayhead, unscrewing counterclockwise from the fitting.
 - b. On units with AFS sprayheads, open the sprayhead with a thin bladed screwdriver and clean out any lime deposits.
 - c. Clean the sprayhead with a soft bristled brush and detergent solution.
 - d. Clean the brewcone rails with a brush soaked with detergent. Rinse, then dry the area.
4. Wash the brewcone and wire brew basket, if applicable. Use a soft bristled brush for hard to clean areas. Wash both parts with a detergent solution or put these parts through a dishwasher.





IMPORTANT: Clean out the screen, within the brewcone, to maintain the flow of brewed tea. Neglecting this screen will eventually cause the brewcone to overflow, spilling hot liquid over the unit.

5. Wash the tea container and top cover with a detergent solution. Remove the faucet assembly. Unscrew the handle assembly from the faucet and remove. Clean the faucet shank with a gage glass brush (circular bristle) by pushing the brush through the shank. Using the same brush clean the faucet body inlet and outlet. Clean the faucet cap and silicone seat cup.



CAUTION: DO NOT use undiluted bleach or chlorine.


6. After cleaning, place the parts (sprayhead, brewcone and basket and faucet parts) into a sink to be sanitized.
To sanitize the disassembled parts:
 - a. Use a clean container to submerge all parts. Wear rubber gloves for protection.
 - b. Immerse in commercial Bar Tabs/Sani-Tabs sanitizing solution
The solution must be warm (75°F.) Let the parts soak for at least one minute.
7. Thoroughly rinse parts with warm water. Air dry parts that were sanitized. Return to the unit and assemble parts that were removed.

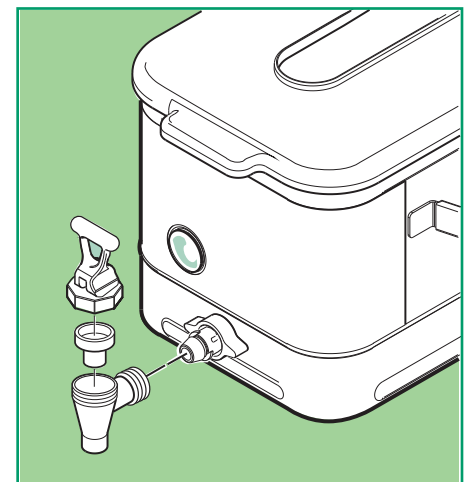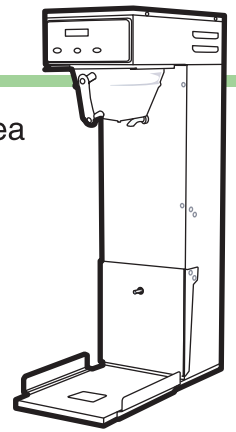

WILBUR CURTIS COMPANY, INC.

6913 Acco Street, Montebello, CA 90640-5403

Telephone: 800-421-6150 323-837-2300 Fax: 323-837-2406



find the latest on the web at
www.wilburcurtis.com